

# niglon

Circuit Protection

## NFK2 Compact Contractor Fuse Kit

Contents: 180pc

Plug Top Fuses:

3A, 5A, 13A

Quick Acting Fuses:

500mA, 1A, 2A, 2.5A, 3.5A, 5A


Time Delay Fuses:

1A, 1.25A, 1.6A, 2A, 2.5A,


3.15A, 5A, 6.3A, 10A




### Plug Top Fuse Technical Drawing

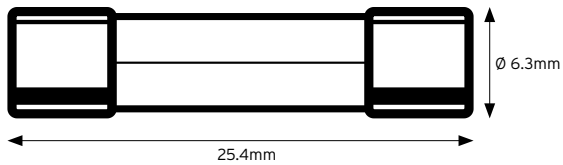

### Quick Acting Fuse Technical Drawing

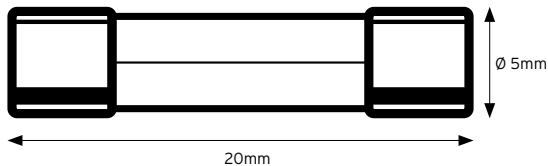

### Time Delay Fuse Technical Drawing

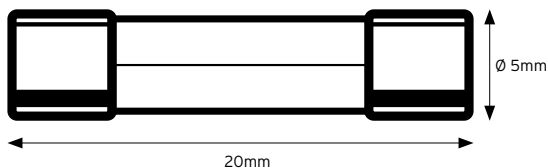

### Plug Top Fuses Technical Specifications

Standard of Compliance	BS 1362
Quantity	10 of each type
Size	25.4 x Ø 6.3mm

### Maximum Earth Fault Loop Impedance (Zs)

Amp	Zs (Ohm)	
	Disconnection Time	
	0.4s	5s
3A	22.1	39.4
5A	11.5	21.2
13A	4.4	7.4

Remarks:

- 1). For TN system
- 2) Voltage to earth (Uo) equals to 230VAC

### Quick Acting Fuse Technical Specifications

Standard of Compliance	BS EN 60127/2
Quantity	10 of each type
Size	20 x Ø 5mm

### Time Delay Fuse Technical Specifications

Standard of Compliance	BS EN 60127/2
Quantity	10 of each type
Size	20 x Ø 5mm