

# niglon Control & Automation

## MOTOR CONTROL GEAR

### MANUAL MOTOR STARTER ACCESSORIES

### AUX1/1MMS




Plug in auxilliary contact for manual motor starters.  
Front mounting, taking the place of the blanking plug  
below the main contact terminals

#### General Characteristics

Standards	IEC 60947-4, UL-508
Number of Modules	18
AC-1 Rated Current	5A
Contact arrangement	1NO and 1NC
Terminal Capacity	up to 1.5mm <sup>2</sup>
Backup fuse gG, gL	16A
Weight	0.018Kg

#### Wiring Diagram

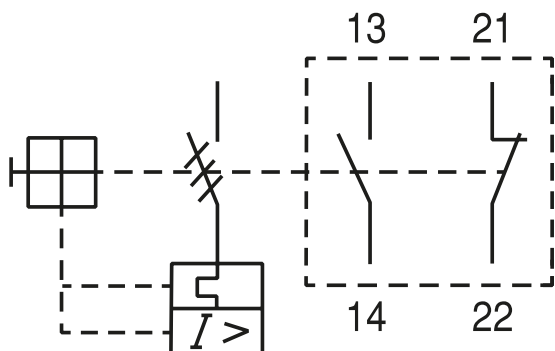

#### Additional Information

This product is for use by skilled persons or instructed persons. The installation of this product must comply with current IEE regulations. Terminals, including those factory fitted, must be checked for correct tightness before commissioning. All terminals should be periodically checked for correct tightness. The data herein serves only to describe the product and should not be regarded as representing guaranteed properties in the legal sense. We reserve the rights of modification, whilst every care has been taken in ensuring the accuracy of this catalogue, the Supplier accepts no liability whatsoever for any eventuality arising from errors or omissions within its catalogues, brochures or within any online presence.