
NIGLON[®] Control & Automation MOTOR **CONTROL** GEAR LARGE 4 POLE CONTACTOR AC/DC COIL 4LC230


4 pole contactors are for switching resistive loads, such as lighting or heating. Front or side auxiliary contacts are optional. Din rail mounting.

General Characteristics	
Standards	IEC 60947-4, UL-508
AC-1 Rated Load	300A
AC-3 Rated Power @ 415V	90kW
Rated Operational Voltage (Ue)	≥ 690V
Number of Main Poles	4
Auxiliary Contacts	2NO + 2NC
Maximum Operation Frequency	1200 per hour
Mechanical Endurance	5 000 000 ops
Electrical Endurance	1 000 000 ops
Width	175mm
Height	203mm
Depth	181mm
Terminal Bolt	M10
Tightening Torque	15Nm
Weight	5.55Kg
Coil Characteristics	
Coil Voltage Range	100/240V AC/DC
Inrush Current	380 VA
Sealed Current	11.6 VA
Pull-in Voltage	80 - 110 %
Thermal Dissipation	4.7 VA
Closing time	
	45 ms
	45 ms
Available Accessories	
AUX0/2FM	Auxilliary Contact 2NC
AUX0/2FM AUX1/1FM	Auxilliary Contact 2NC Auxilliary Contact 1NO/1NC
AUXO/2FM AUX1/1FM AUXO/4FM	Auxilliary Contact 2NC Auxilliary Contact 1NO/1NC Auxilliary Contact 4NC
AUX0/2FM AUX1/1FM AUX0/4FM AUX1/3FM	Auxilliary Contact 2NC Auxilliary Contact 1NO/1NC Auxilliary Contact 4NC Auxilliary Contact 1NO/3NC
AUXO/2FM AUX1/1FM AUXO/4FM AUX1/3FM AUX2/2FM	Auxilliary Contact 2NC Auxilliary Contact 1NO/1NC Auxilliary Contact 4NC Auxilliary Contact 1NO/3NC Auxilliary Contact 2NO/2NC
AUXO/2FM AUX1/1FM AUXO/4FM AUX1/3FM AUX2/2FM AUX3/1FM	Auxilliary Contact 2NC Auxilliary Contact 1NO/1NC Auxilliary Contact 4NC Auxilliary Contact 1NO/3NC Auxilliary Contact 2NO/2NC Auxilliary Contact 3NO/1NC
AUXO/2FM AUX1/1FM AUXO/4FM AUX1/3FM AUX2/2FM	Auxilliary Contact 2NC Auxilliary Contact 1NO/1NC Auxilliary Contact 4NC Auxilliary Contact 1NO/3NC Auxilliary Contact 2NO/2NC

Technical Drawing

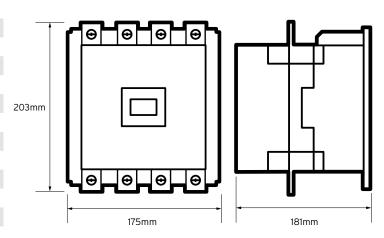

Wiring Diagram

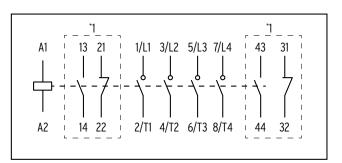

*1 - Optional auxiliary contact unit

NiGLON

Additional Information

AUX1/OSM

мсмі

This product is for use by skilled persons or instructed persons. The installation of this product must comply with current IEE regulations. Terminals, including those factory fitted, must be checked for correct tightness before commissioning. All terminals should be periodically checked for correct tightness. The data herein serves only to describe the product and should not be regarded as representing guaranteed properties in the legal sense. We reserve the rights of modification, whilst every care has been take in ensuring the accuracy of this catalogue, the Supplier accepts no liability whatsoever for any eventuality arising from errors or omissions within its catalogues, brochures or within any online presence.

Auxilliary Contact 1NO side mount

Mechanical Interlock

0121 711 1990 sales@niglon.co.uk | www.niglon.co.uk