
NiGLON Industrial **Accessories**

IS254P-L Insulated Rotary Isolator

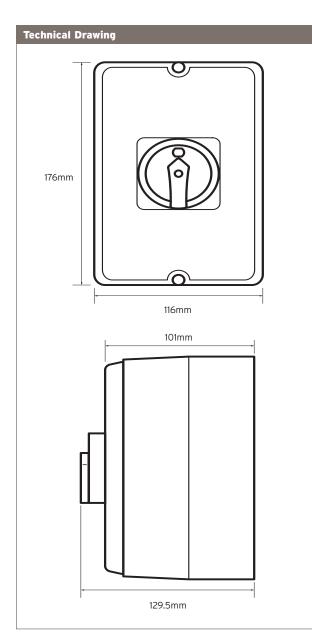

ng


| Tec | hnical | Speci | fications | |
|-----|--------|-------|-----------|--|
| | | | | |

| Standards | EN60947-3 |
|--|------------------|
| Rated Current | 25A |
| No.of Poles | 4 |
| Rated Insulation Voltage(V) | 690V |
| Rated Operating Current(A) | 25 |
| AC-22A | 25 |
| AC-23A | 25 |
| AC-3 | 20 |
| Rated Votage(Ue) | 440V |
| Rated Power Control(KW) | 7.5 |
| Rated short-time withstand current(Icw) | 500A |
| Connect Wire | 4mm ² |
| Screw Torque | 1.2 N.m |

Enclosure Characteristics

| Overall Dimensions HxWxD | 176x116x101mm |
|--------------------------|--|
| Depth with switch | 129.5mm |
| Degree of IP | IP65 |
| Colour | Upper cover RAL9002, Bottom case RAL 7031 |

Wiring Diagram



Note 7 = Early Make Contact

Niglon

0121 711 1990 sales@niglon.co.uk | www.niglon.co.uk