


# nigLON

## Circuit Protection

### DRT20

### Mechanical Stair Timer


30 Sec - 20 Min

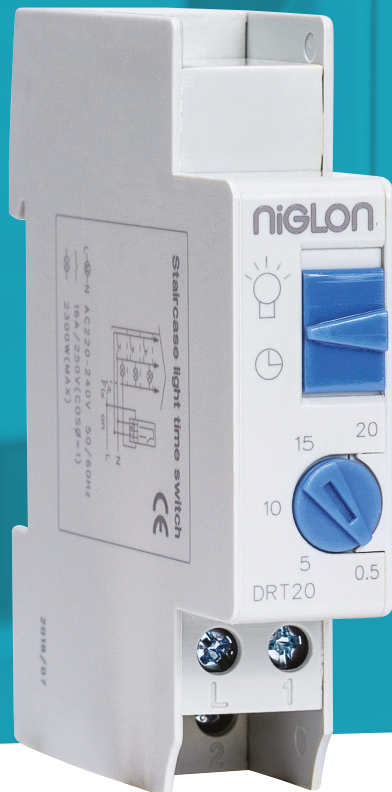

The DRT20 is a variable delay timer to control stairwell lighting.

A momentary action push button will initiate the DHC18 output, which will then 'time-out' after a pre-set delay has elapsed.

#### Technical Drawing

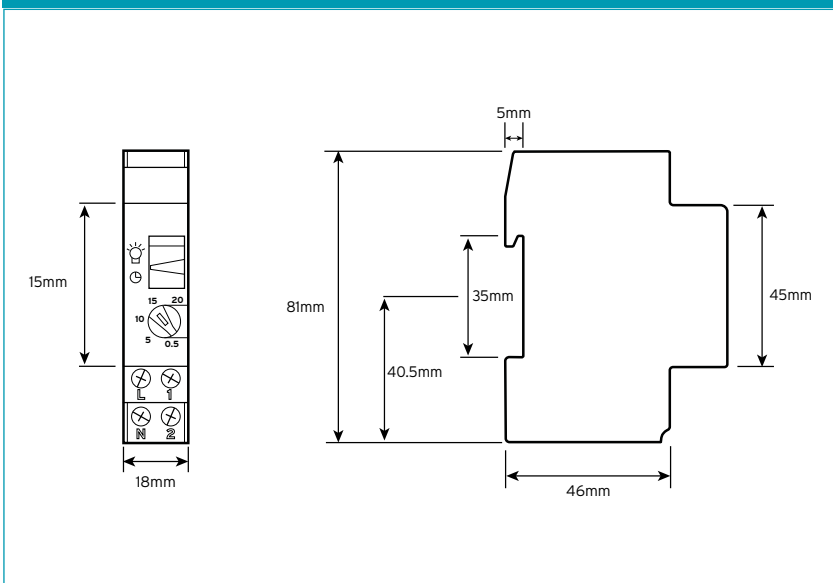

#### Technical Specifications

<b>AC Switching Capacity</b>	16A 250v AC Resistive Load 10A 250v AC Inductive Load cos $\Phi$ 0,6 2300W Incandescent Lamp Load
<b>Adjustment Range</b>	05 min - 20min
<b>Contact Type</b>	Normally Open
<b>Delay Type</b>	Delay to off
<b>Ambient Temperature</b>	-10°C to 55°C
<b>Ambient Humidity</b>	45~85% RH
<b>Weight</b>	Approx. 75g
<b>Protection Type</b>	IP20
<b>Dimensions</b>	85mm H x 18mm W x 65Dmm

