

ENCLOSED SWITCHGEAR

HRC FUSES TO SUIT SWITCHFUSES A RANGES





General Characteristics

Standards	BS 88.2
Voltage (AC) A2	550 V
Voltage (AC) A3 & A4	415 V
Breaking Capacity	80KA
Curve Type	Gg
Compact Dimensions A2 (AxBxC)	86x13.5x73mm
Standard Dimensions A3 (AxBxC)	87x21x73mm
Compact Dimensions A3 (AxBxC)	84x 17.1 x73mm
Compact Dimensions A4 (AxBxC)	110x21x94mm

Available Options

TIA25	A2, 125A, Compact
TIA32	A2, 32A, Compact
TIS36	A3, 36A, Compact
TIS40	A3, 40A, Compact
TIS50	A3, 50A, Compact
TIS63	A3, 63A, Compact
TIS80	A3, 80A, Compact
TIS100	A3, 100A, Compact
TCP63	A4, 63A, Compact
TCP80	A4, 80A, Compact
TCP100	A4, 100A, Compact

Technical Drawing

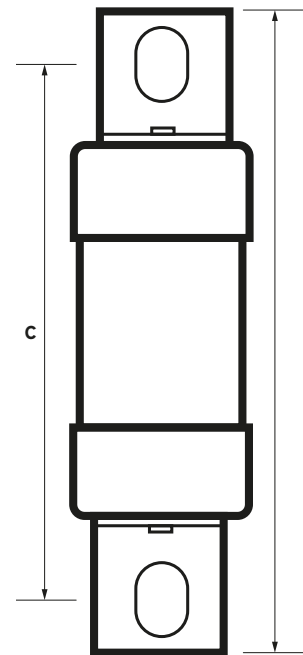

Additional Information

This product is for use by skilled persons or instructed persons. The installation of this product must comply with current IEE regulations. The IP rating of the unit can be compromised if the correct use of glands is not followed. Terminals, including those factory fitted, must be checked for correct tightness before commissioning. All terminals should be periodically checked for correct tightness. The data herein serves only to describe the product and should not be regarded as representing guaranteed properties in the legal sense. We reserve the rights of modification whilst every care has been taken in ensuring the accuracy of this catalogue, the Supplier accepts no liability whatsoever for any eventuality arising from errors or omissions within its catalogues, brochures or within any online presence.