

ENCLOSED SWITCHGEAR

HRC FUSES TO SUIT SWITCHFUSES B RANGES




General Characteristics

Standards	BS 88.2
Voltage (AC)	415 V AC
Breaking Capacity	80KA
Curve Type	Gg
Compact Dimensions B2 (AxBxC)	138x41.9x111mm
Standard Dimensions B3 & B4 (AxBxC)	138x59.1x111mm

Available Options

TF125	B2, 125A, Compact
TF160	B2, 160A, Compact
TF200	B2, 200A, Compact
TKF250	B3, 250A, Standard
TKF315	B3, 315A, Standard
TMF355	B4, 355A, Standard
TMF400	B4, 400A, Standard

Technical Drawing

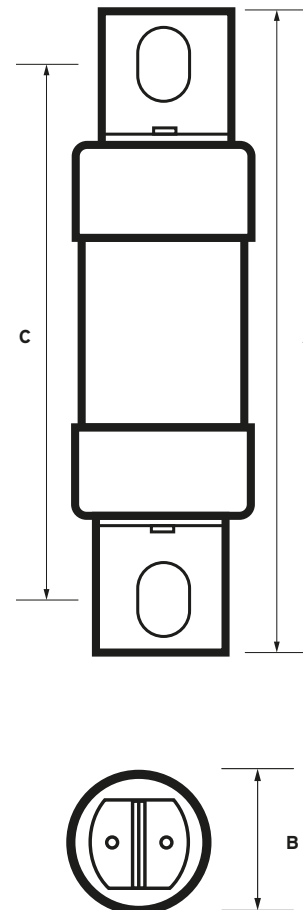

Additional Information

This product is for use by skilled persons or instructed persons. The installation of this product must comply with current IEE regulations. The IP rating of the unit can be compromised if the correct use of glands is not followed. Terminals, including those factory fitted, must be checked for correct tightness before commissioning. All terminals should be periodically checked for correct tightness. The data herein serves only to describe the product and should not be regarded as representing guaranteed properties in the legal sense. We reserve the rights of modification whilst every care has been taken in ensuring the accuracy of this catalogue, the Supplier accepts no liability whatsoever for any eventuality arising from errors or omissions within its catalogues, brochures or within any online presence.