

ENCLOSED SWITCHGEAR

HRC FUSES TO SUIT SWITCHFUSES C RANGES




General Characteristics

Standards	BS 88.2
Voltage (AC)	415 V AC
Breaking Capacity	80KA
Curve Type	Gg
Size	Standard
Dimensions C2 (AxBxC)	212x74.4x183.8mm
Dimensions C3 (AxBxC)	212x82.4x183.8mm

Available Options

TTM450	C2, 450A
TTM500	C2, 500A
TTM630	C2, 630A
TLM710	C3, 710A
TLM750	C3, 750A
TLM800	C3, 800A

Technical Drawing

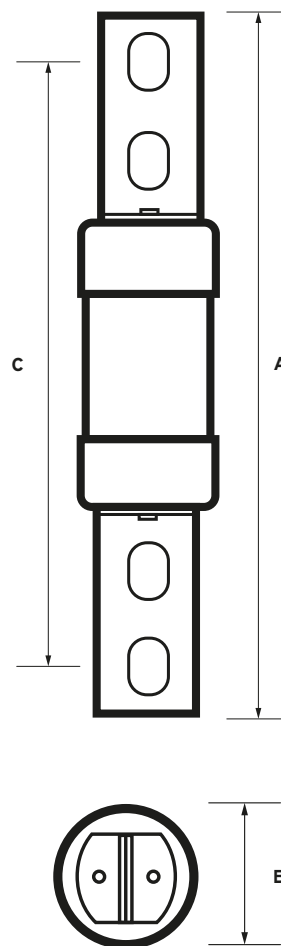

Additional Information

This product is for use by skilled persons or instructed persons. The installation of this product must comply with current IEE regulations. The IP rating of the unit can be compromised if the correct use of glands is not followed. Terminals, including those factory fitted, must be checked for correct tightness before commissioning. All terminals should be periodically checked for correct tightness. The data herein serves only to describe the product and should not be regarded as representing guaranteed properties in the legal sense. We reserve the rights of modification whilst every care has been taken in ensuring the accuracy of this catalogue, the Supplier accepts no liability whatsoever for any eventuality arising from errors or omissions within its catalogues, brochures or within any online presence.