


P-DVSS

Dual Volt Shaver Socket 20VA



A modern range of ultra-slim, smooth-edged, moulded wiring accessories-manufactured in a bright white Urea.

Technical Drawing

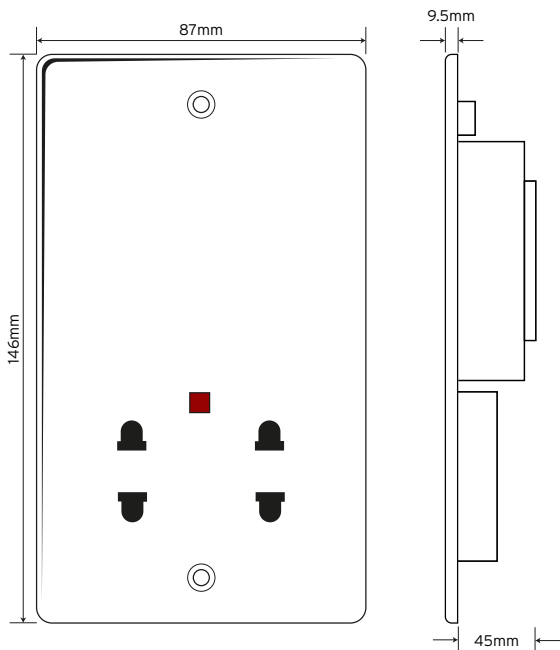

Technical Specifications

Material Composition:

| | |
|-------------------------|---|
| Front Plate | Urea |
| Rear Housing | Urea |
| Terminals | Brass |
| Earth Strap | Mild Steel |
| Terminal Screws | Steel & Yellow Passivated Silver "on-lay" Copper/Brass Contacts |
| Voltage | 240V ~ 50Hz |
| Current Rating | 20VA at 230V or 115V |
| Terminal Size | 3.5mmØ |
| Torque Value | 0.4Nm |
| Cable Size | 2 x 1.5mm ² or 1 x 2.5mm ² |
| Back Box Depth | 47mm |
| Twin Earth | Yes |
| Warranty | 30 years |
| IP Rating | P21 |
| Operational Temperature | -5 ° to +40 °C |
| Standards | The Low Voltage Directive 2006/95/EC, Modified ISO 22196 |
| | BS EN 61558-1:1997 + A1:1998 + A11:2003, IEC 60884-1 BS 546 (Socket Outlet Part) |