

niGLON™


Circuit Protection

DRT2471D

Digital 24Hr Timer



Technical Drawing

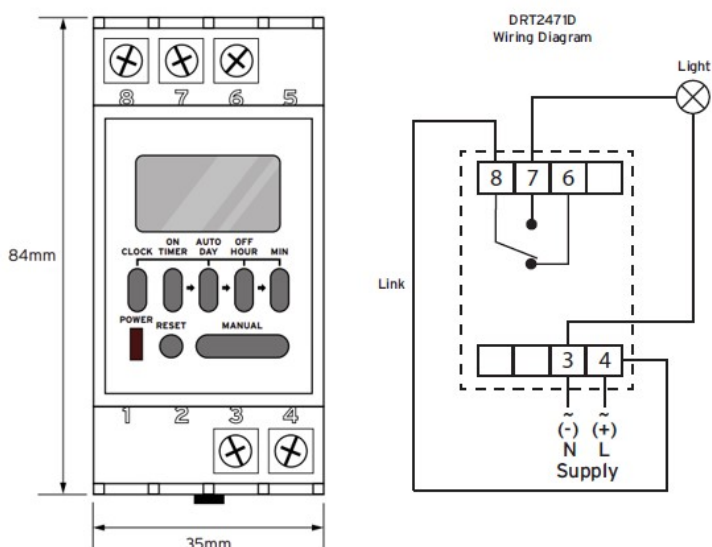

Technical Specifications

Frequency	50 - 60Hz
Contact	Changeover Contact (Volt-Free)
Current	
Consumption	7VA approx.
Running Accuracy	< +/- 1 sec/day at 20C
Switching Capacity	16A, 120/240Vac, Resistive 8A 120/240Vac, General Use 1/2HP, 120/240Vac
Switching Command	1 minute
Switching Accuracy	1 minute
ON/OFF (event)	8 per day
Memory Back-up	Lithium Battery CR2032 or High Technique Gold Capacitor for Power Reserve more than 36 hours after fully charged
Admissable Ambient Temp.	-10C to 55C
Dimensions	84 L x 35 W x 60mm D