

# niGLON


## Circuit Protection

# DRT2472D

## Digital 24Hr Timer



### Technical Drawing

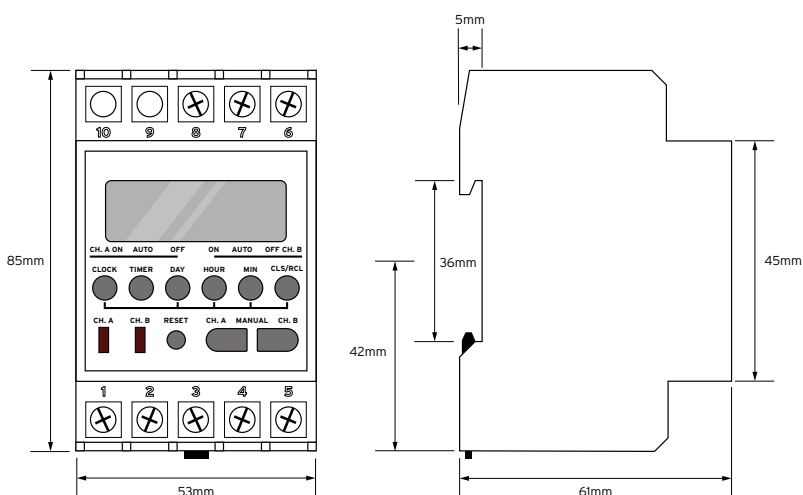

### Technical Specifications

Frequency	45-60Hz
Contact	Changeover Contact
Current Consumption	approx 7VA
Running Accuracy	$\leq \pm 1$ second/day at 20°C
Switching Capacity	16A, 120/240Vac Resistance 8A 120/240Vac, General Use 1/2HP, 120/240Vac
Switching Command	1 Minute
Switching Accuracy	Precise-to-minute
Memory Back-up	Lithium Battery CR2032 or High Technique Gold Capacitor for Power Reserve more than 36 Hours After Fully Charged
Admissible Ambient temp.	-10°C to 55°C
Dimensions	85mm H x 53mm W x 61mm D

## Wiring Diagram

