

niGLON

Circuit Protection


RCD4-40/30

4P RCCB 400V

Type AC (Incomer)



Technical Drawing

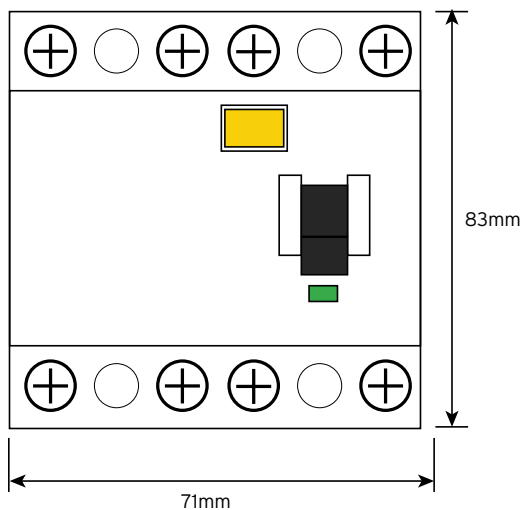

Technical Specifications

Rated current(I _n)	40A
Rate voltage(U _n)	400V
Rated residual current	30mA
Number of Poles	3P + N
Rated Short Circuit	6kA
Breaking Capacity	10kA
Rated frequency	50/60Hz
Electrical endurance	10000 cycles
Mechanical endurance	20000 cycles
Terminals	Pillar type
Cable Capacity	35mm ²
Torque of screw	2.5Nm
Standard of Compliance	BS EN61008-1
Certified	intertek
Dimensions	83 x 71 x 60mm (HxWxD)