


niGLON

Industrial Accessories



16116 IP44 Compact Wall Mounted Interlocking Switched Socket

Technical Drawing

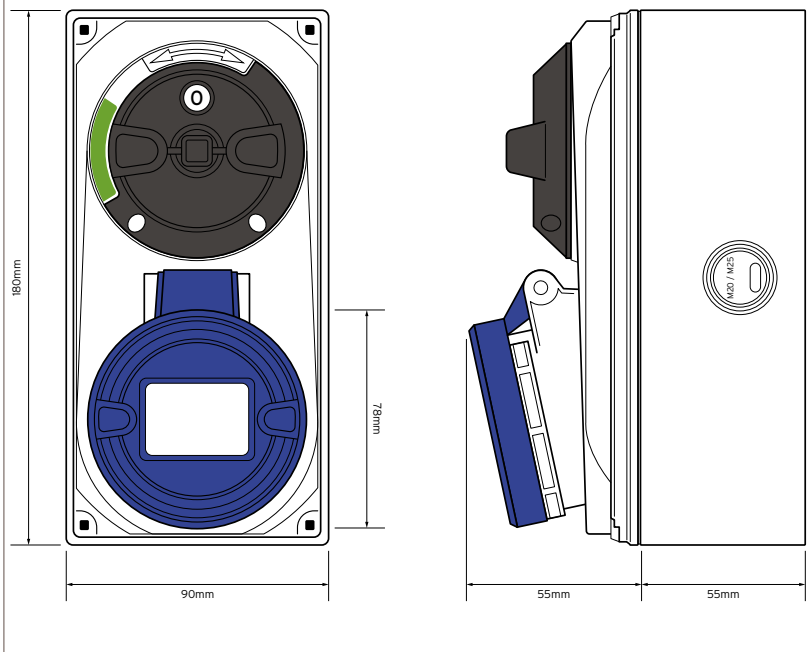

Technical Specifications

Housing Material	PA6 - PC/ABS
Contacts	Nickel-plated contacts
Cable Entry	Rear entry: M20/M25 and M25/M32 Side entry: (left and right) M20/M25 Top entry: M25/M32 Bottom entry: M20/M25
Amps	32A
Volts	230V
Pin Configuration	3P
IP Rating	IP44
Wire Flexible	2.5-6mm ²
Wire Solid	2.5-10mm ²
Weight	665g
Standards	BS EN 60309-1&2, EN 60947-3
Certified	OVE & CE
Dimensions	180mm H x 90mm W x 110mm D

