


Fuse Switches // Mild Steel



Note: The fuse link size must not exceed the maximum rating of the fuse carrier.

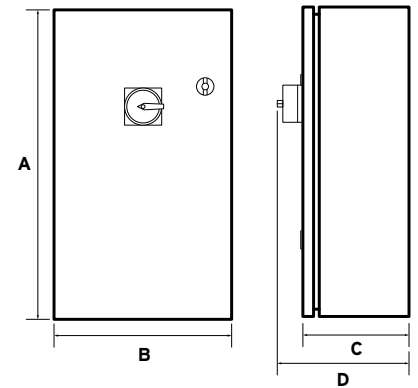

Part No.	AC23 (A)	Fuselink Size (mm)	Terminal Capacity (mm ²)	Dimensions				Qty
				A (mm)	B (mm)	C (mm)	D (mm)	
MS203PFS	20	10x38	10	300	250	150	194	1
MS323PFS	32	10x38	10	300	250	150	194	1
MS633PFS	63	22x58	35	500	300	200	244	1
MS803PFS	80	22x58	35	500	300	200	244	1
MS1003PFS	100	22x58	35	500	300	200	244	1

Specifications //


- Standard of Compliance Enclosure IEC 61439-1
- Standard of Compliance Switch - IEC EN 60947-1&3
- Standard of Compliance Fuse Holder - EN 60269-1
- IP Rating - IP54
- RAL - 7035
- Fuses - Sold Separately - see below

Cylindrical Fuses // Standard gL



Part No.	Amp (A)	Rated Voltage / Breaking Capacity	Dimensions		Fuse Switch Size	Qty
			A (mm)	B (mm)		
G1038-16	16	500V / 120kA	10	38	20 - 32	10
G1038-20	20	500V / 120kA	10	38	20 - 32	10
G1038-25	25	500V / 120kA	10	38	20 - 32	10
G1038-32	32	400V / 120kA	10	38	20 - 32	10
G2258-40	40	690V / 80kA	22	58	63 - 100	10
G2258-50	50	690V / 80kA	22	58	63 - 100	10
G2258-63	63	690V / 80kA	22	58	63 - 100	10
G2258-80	80	690V / 80kA	22	58	63 - 100	10
G2258-100	100	500V / 120kA	22	58	63 - 100	10

Discount structure on these items differ to the standard discount used throughout this catalogue.

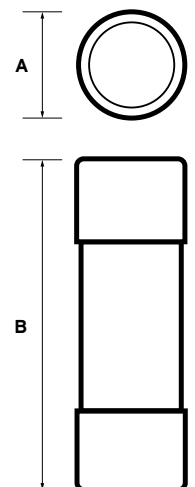

Specifications //

- Standards of Compliance - IEC 60269-1 & -2
- Body Material - Ceramic
- Characteristic - gG