


Enclosures // GRP

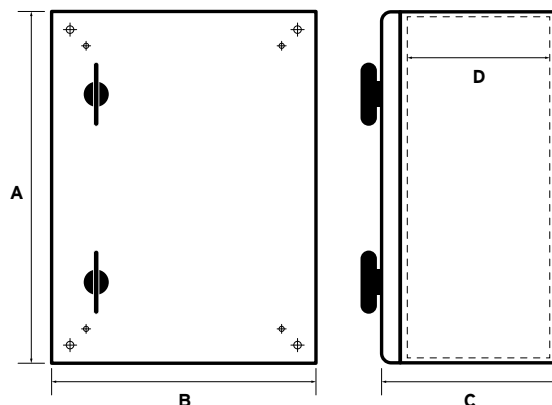


| Part No. | Dimensions | | | Usable Depth D (mm) | Locks | Weight (kg) | Qty |
|----------|------------|--------|--------|------------------------|-------|----------------|-----|
| | A (mm) | B (mm) | C (mm) | | | | |
| P302514 | 300 | 250 | 140 | 78 | 1 | 2.2 | 1 |
| P403020 | 400 | 300 | 200 | 138 | 2 | 3.7 | 1 |
| P404020 | 400 | 400 | 200 | 138 | 2 | 4.6 | 1 |
| P504020 | 500 | 400 | 200 | 138 | 2 | 5.5 | 1 |
| P604023 | 600 | 400 | 230 | 167 | 2 | 7.5 | 1 |
| P605023 | 600 | 500 | 230 | 167 | 2 | 8.2 | 1 |
| P806030 | 800 | 600 | 300 | 237 | 2 | 13.1 | 1 |

More sizes available on request please call us on 0121 711 1990 or send us an email sales@niglon.co.uk

Specifications //

- Standard of Compliance - IEC 60529, IEC 62262
- Material - Glass fibre reinforced polycarbonate
- IP Rating - IP66 (IEC60529)
- Impact Rating - IK10
- RAL - 7035
- Flame Test - 960°C
- Temperature Range - -30°C to +105°C
- Suited to - Extreme conditions
- Certifications -

Enclosures // GRP with Glazed Doors

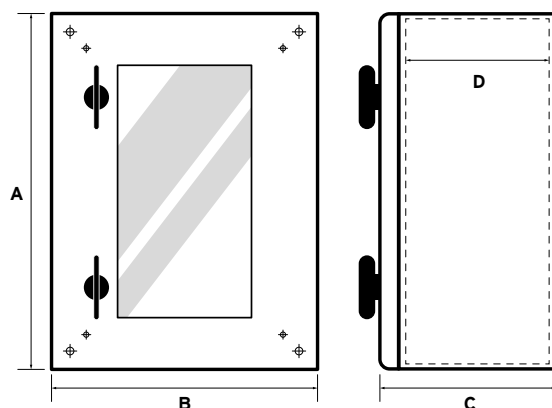

| Part No. | Dimensions | | | Usable Depth D (mm) | Locks | Weight (kg) | Qty |
|----------|------------|--------|--------|------------------------|-------|----------------|-----|
| | A (mm) | B (mm) | C (mm) | | | | |
| PG302514 | 300 | 250 | 140 | 78 | 1 | 2.2 | 1 |
| PG403020 | 400 | 300 | 200 | 138 | 2 | 3.7 | 1 |
| PG404020 | 400 | 400 | 200 | 138 | 2 | 4.6 | 1 |
| PG504020 | 500 | 400 | 200 | 138 | 2 | 5.5 | 1 |
| PG604023 | 600 | 400 | 230 | 167 | 2 | 7.5 | 1 |
| PG605023 | 600 | 500 | 230 | 167 | 2 | 8.2 | 1 |
| PG806030 | 800 | 600 | 300 | 237 | 2 | 13.1 | 1 |

More sizes available on request please call us on 0121 711 1990 or send us an email sales@niglon.co.uk

Specifications //

- Standard of Compliance - IEC 60529, IEC 62262
- Material - Glass fibre reinforced polycarbonate
- IP Rating - IP66 (IEC60529)
- Impact Rating - IK08 (IEC62262)
- RAL - 7035
- Flame Test - 960°C
- Temperature Range - -30°C to +105°C
- Suited to - Extreme conditions
- Certifications -