


## Enclosures // GRP, Opaque Lid

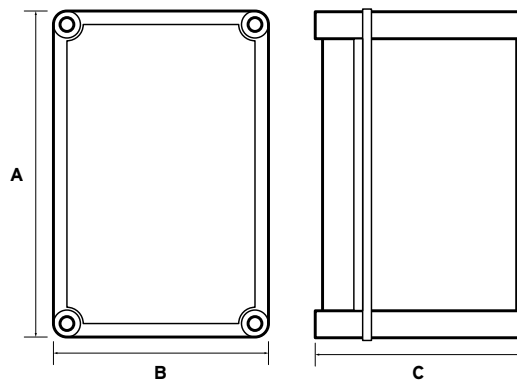


Part No.	Dimensions			Weight (kg)	Qty
	A (mm)	B (mm)	C (mm)		
PBOX02	180	135	129	0.44	1
PBOX06	270	180	171	1.18	1
PBOX07	270	270	171	1.64	1
PBOX08	270	360	171	1.98	1
PBOX09	270	360	201	2.05	1

More sizes available on request please call us on 0121 711 1990 or send us an email sales@niglon.co.uk

### Specifications //

- Standard of Compliance - IEC 60529, IEC 62262
- Material - Glass fibre reinforced polycarbonate
- IP Rating - IP66 (IEC60529)
- Impact Rating - IK09 (IEC62262)
- RAL - 7035
- Flame Test - 960°C
- Temperature Range - -30°C to +60°C
- Suited to - Extreme conditions

## Enclosures // GRP, Transparent Lid

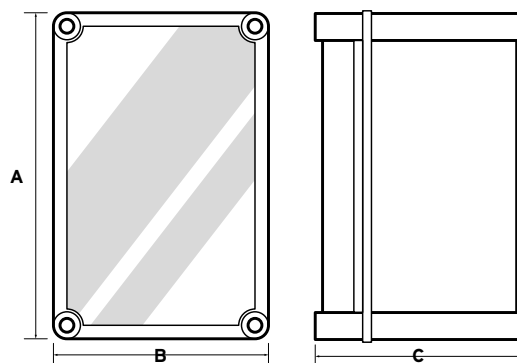

Part No.	Dimensions			Weight (kg)	Qty
	A (mm)	B (mm)	C (mm)		
PBOXT03	180	180	129	0.5	1
PBOXT04	270	135	129	0.58	1
PBOXT05	270	180	141	1.18	1
PBOXT06	270	180	171	1.18	1
PBOXT07	270	270	171	1.64	1
PBOXT08	270	360	171	1.98	1
PBOXT09	270	360	201	2.05	1
PBOXT11	360	360	171	2.42	1
PBOXT13	540	270	171	2.96	1

More sizes available on request please call us on 0121 711 1990 or send us an email sales@niglon.co.uk

### Specifications //

- Standard of Compliance - IEC 60529, IEC 62262
- Material - Glass fibre reinforced polycarbonate
- IP Rating - IP66 (IEC60529)
- Impact Rating - IK09 (IEC62262)
- RAL - 7035
- Flame Test - 960°C
- Temperature Range - -30°C to +60°C
- Suited to - Extreme conditions