



## HRC Fuses to Suit Switchfuses // A Ranges

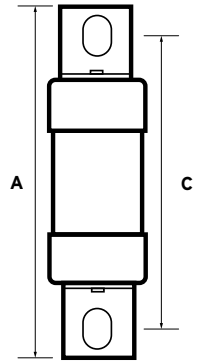

Part No.	Range	Amp (A)	Voltage (AC)	Size	Dimensions			Qty
					A (mm)	B (mm)	C (mm)	
TIA25	A2	25	550	Compact	86	13.5	73	10
TIA32	A2	32	550	Compact	86	13.5	73	10
TIS36	A3	36	415	Compact	84	17.1	73	10
TIS40	A3	40	415	Compact	84	17.1	73	10
TIS50	A3	50	415	Compact	84	17.1	73	10
TIS63	A3	63	415	Compact	84	17.1	73	10
TIS80	A3	80	415	Standard	87	21	73	10
TIS100	A3	100	415	Standard	87	21	73	10
TCP63	A4	63	415	Compact	110	21	94	1
TCP80	A4	80	415	Compact	110	21	94	1
TCP100	A4	100	415	Compact	110	21	94	1




**Specifications // A2 & A3**

- Standards of Compliance - BS 88.2
- Fixing Centres - 73mm
- Class - ASTA20CERT


**Specifications // A4**

- Standards of Compliance - BS 88.2
- Fixing Centres - 94mm
- Class - ASTA20CERT

## HRC Fuses to Suit Switchfuses // B Ranges

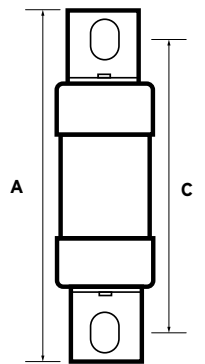

Part No.	Range	Amp (A)	Voltage (AC)	Size	Dimensions			Qty
					A (mm)	B (mm)	C (mm)	
TF125	B2	125	415	Compact	138	41.9	111	1
TF160	B2	160	415	Compact	138	41.9	111	1
TF200	B2	200	415	Compact	138	41.9	111	1
TKF250	B3	250	415	Standard	138	59.1	111	1
TKF315	B3	315	415	Standard	138	59.1	111	1
TMF355	B4	355	415	Standard	138	59.1	111	1
TMF400	B4	400	415	Standard	138	59.1	111	1



**Specifications //**

- Standards of Compliance - BS 88.2
- Fixing Centres - 111mm
- Class - ASTA20CERT

## LOCK OUT, TAG OUT Safety Solutions


Contact our sales team for more information:  
 ☎ 0121 711 1990 | ✉ sales@niglon.co.uk

Padlocks

Hasps



## HRC Fuses to Suit Switchfuses // C Ranges

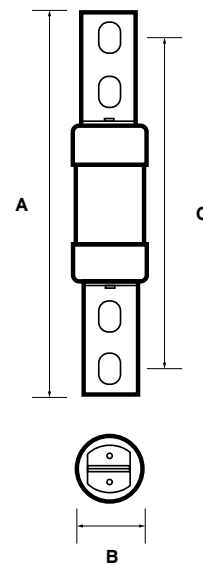



Part No.	Range	Amp (A)	Voltage (AC)	Size	Dimensions			Qty
					A (mm)	B (mm)	C (mm)	
TTM450	C2	450	415	Standard	212	74.4	183.8	1
TTM500	C2	500	415	Standard	212	74.4	183.8	1
TTM630	C2	630	415	Standard	212	74.4	183.8	1
TLM710	C3	710	415	Standard	212	82.4	183.8	1
TLM750	C3	750	415	Standard	212	82.4	183.8	1
TLM800	C3	800	415	Standard	212	82.4	183.8	1



### Specifications //

- Standards of Compliance - BS 88.2
- Fixing Centres - 133mm
- Class - ASTA20CERT

## Enclosed Manual Changeover Switches 4 Pole // Polycarbonate

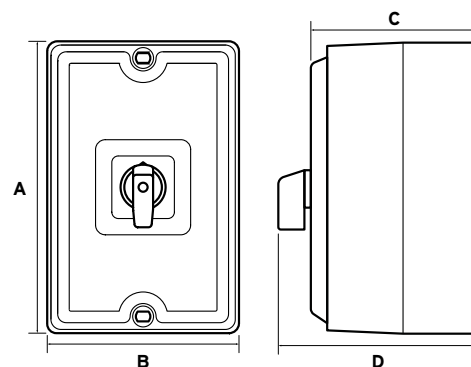

Part No.	Rated Current (A)	Terminal Capacity (mm)	Dimensions				Qty
			A (mm)	B (mm)	C (mm)	D (mm)	
CS204P	20	2.5	126	101	86	120	1
CS404P	40	10	176	116	101	140	1
CS634P	63	16	176	116	101	140	1
CS804P	80	25	240	160	162	200	1
CS1004P	100	35	240	160	162	200	1

### Specifications //

- Standard of Compliance Enclosure - IEC EN 61439-1 & 3
- Standard of Compliance Switch - BS EN 60947-3
- IP Rating - IP65
- RAL - 7035
- Positioning - 3 Position with centre OFF
- Certification - Ⓢ