



# Thermal Overload Relays for Standard 3 Pole Contactors



Protective cover to prevent changes being made once set.

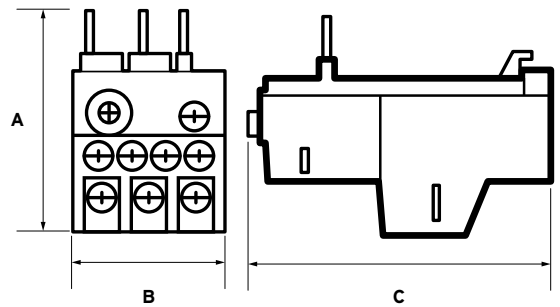

Part No.	AC3 Motor Rating (A)	Dimensions			Qty
		A (mm)	B (mm)	C (mm)	
ORSC0.16	0.1 - 0.16	63	44	85	1
ORSC0.25	0.16 - 0.25	63	44	85	1
ORSC0.4	0.25 - 0.4	63	44	85	1
ORSC0.63	0.4 - 0.63	63	44	85	1
ORSC1.0	0.63 - 1.0	63	44	85	1
ORSC1.6	1.0 - 1.6	63	44	85	1
ORSC2.5	1.6 - 2.5	63	44	85	1
ORSC4	2.5 - 4	63	44	85	1
ORSC6	4 - 6	63	44	85	1
ORSC8	5 - 8	63	44	85	1
ORSC9	6 - 9	63	44	85	1
ORSC10	7 - 10	63	44	85	1
ORSC13	9 - 13	63	44	85	1
ORSC18	12 - 18	63	44	85	1
ORSC22	16 - 22	63	44	85	1
ORSC32	22 - 32	63	44	85	1
ORSC40	28 - 40	63	44	85	1

**Specifications //**

- Standard of Compliance - EN 60947-4
- Overload Trip - Bimetallic
- Trip Class - 10A
- Trip Auxiliary Contact - 1NO + 1NC
- Failure Protection - Differential current/phase failure
- Reset - Manual/Automatic
- Certification -