


## HRC Fuses to Suit Switchfuses // C Ranges





Part No.	Range	Amp (A)	Voltage (AC)	Size	Dimensions			Qty
					A (mm)	B (mm)	C (mm)	
TTM450	C2	450	415	Standard	212	74.4	183.8	1
TTM500	C2	500	415	Standard	212	74.4	183.8	1
TTM630	C2	630	415	Standard	212	74.4	183.8	1
TLM710	C3	710	415	Standard	212	82.4	183.8	1
TLM750	C3	750	415	Standard	212	82.4	183.8	1
TLM800	C3	800	415	Standard	212	82.4	183.8	1

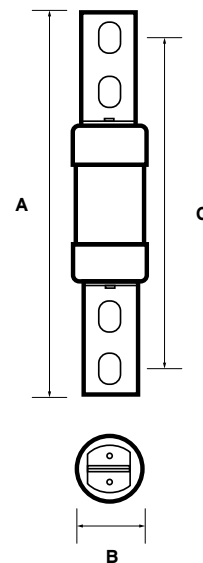

**Specifications //**

- Standards of Compliance - BS 88.2
- Fixing Centres - 133mm
- Class - ASTA20CERT

## Enclosed Manual Changeover Switches 4 Pole // Polycarbonate

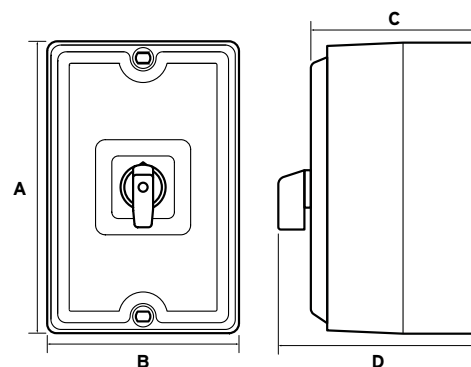


Part No.	Rated Current (A)	Terminal Capacity (mm)	Dimensions				Qty
			A (mm)	B (mm)	C (mm)	D (mm)	
CS204P	20	2.5	126	101	86	120	1
CS404P	40	10	176	116	101	140	1
CS634P	63	16	176	116	101	140	1
CS804P	80	25	240	160	162	200	1
CS1004P	100	35	240	160	162	200	1



**Specifications //**

- Standard of Compliance Enclosure - IEC EN 61439-1 & 3
- Standard of Compliance Switch - BS EN 60947-3
- IP Rating - IP65
- RAL - 7035
- Positioning - 3 Position with centre OFF
- Certification - Ⓢ

## Enclosed Manual Changeover Switches 4 Pole // GRP

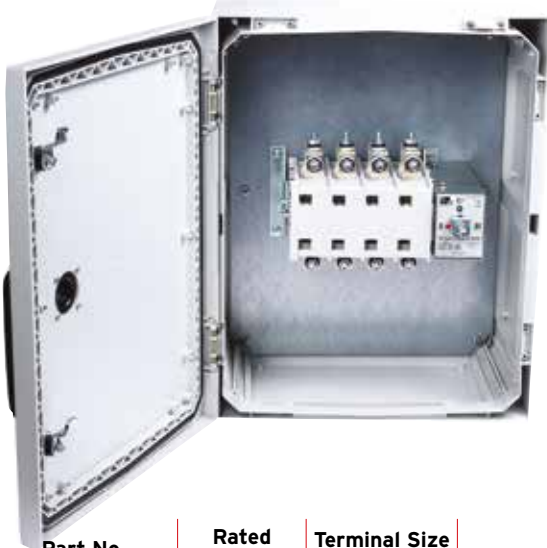

Close up of the change over switch handle.

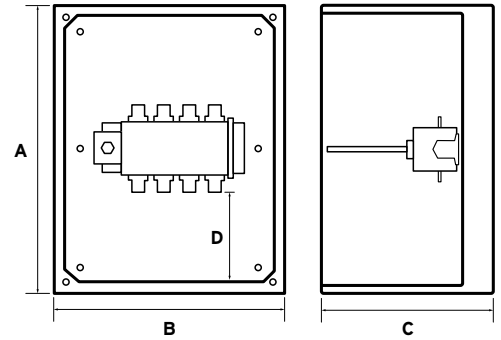

### Specifications //

- Standard of Compliance Enclosure - EN 62208
- Standard of Compliance Switch - EN 60947-3
- Material - Glass fibre reinforced polycarbonate
- Impact Resistant - IK10
- IP Rating - IP65 (Internal fixing system)
- Free From - Halogen
- UV Resistant - UL508
- Handle - Accepts up to 3 padlocks and is defeatable



Part No.	Rated Current (A)	Terminal Size (mm)	Dimensions				Qty
			A (mm)	B (mm)	C (mm)	D (mm)	
PC160MC	160	M8x20	700	500	300	279	1
PC200MC	200	M10x30	700	500	300	270	1
PC250MC	250	M10x30	700	500	300	270	1
PC315MC	315	M10x30	700	500	300	270	1
PC400MC	400	M10x30	800	600	300	288	1
PC630MC	630	M12x40	800	600	300	288	1
PC800MC	800	M12x40	800	600	300	288	1

More sizes available on request please call us on 0121 711 1990 or send us an email sales@niglon.co.uk

## Enclosed Manual Changeover Switches 4 Pole // Mild Steel



Close up of the change over switch handle.

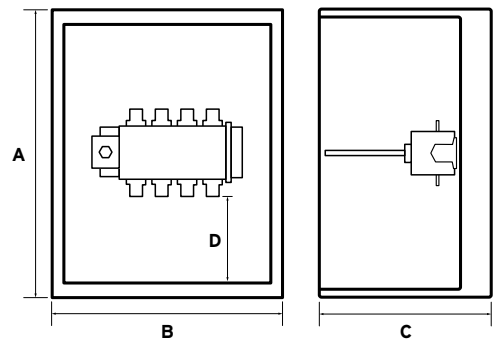

Part No.	Rated Current (A)	Terminal Size (mm)	Dimensions				Qty
			A (mm)	B (mm)	C (mm)	D (mm)	
MS160MC	160	M8x20	500	400	200	179	1
MS200MC	200	M10x30	600	600	300	220	1
MS250MC	250	M10x30	600	600	300	220	1
MS315MC	315	M10x30	600	600	300	220	1
MS400MC	400	M10x30	600	600	300	198	1
MS630MC	630	M12x40	800	600	300	288	1
MS800MC	800	M12x40	800	600	300	288	1
MS1250MC	1250	M12x50	1000	600	300	414	1
MS1800MC	1800	M12x50	1000	600	300	414	1

More sizes available on request please call us on 0121 711 1990 or send us an email sales@niglon.co.uk

### Specifications //

- Standard of Compliance Enclosure - EN 61439-1
- Standard of Compliance Switch - EN 60947-3
- RAL - RAL7035
- Finish - Epoxy powder paint
- IP Rating - IP65 (Polyurethane gasket)
- Gland Plate - Bottom entry
- Comes with - Wall mount brackets and double bit lock
- Handle - Accepts up to 3 padlocks and is defeatable
- Switch - Standard shown
- Range Available - Up to 2500A