



## Automatic Transfer Switches Double Pole // GRP



Pre-installed LED's with labels and key switch



Close up of the included timers in the board.

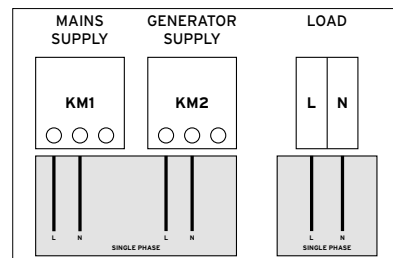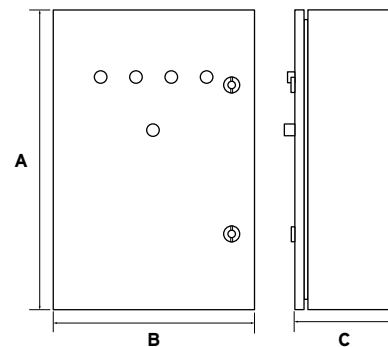

Part No.	Rated Current (A) AC21 at 400V	Terminal Size (mm <sup>2</sup> )	Dimensions			Qty
			A (mm)	B (mm)	C (mm)	
PC32ATS-SP	32	10mm <sup>2</sup>	600	400	210	1
PC60ATS-SP	60	16mm <sup>2</sup>	600	400	210	1
PC100ATS-SP	100	25mm <sup>2</sup>	600	400	210	1
PC135ATS-SP	135	50mm <sup>2</sup>	600	400	210	1

More sizes available on request please call us on 0121 711 1990 or send us an email [sales@niglon.co.uk](mailto:sales@niglon.co.uk)

### Specifications //

- Standard of Compliance - EN 60947-6-1
- Supplied - Fully assembled and tested
- Material - Glass fibre reinforced polycarbonate
- IP Rating - IP65
- Colour - RAL 7035



## Automatic Transfer Switches Double Pole // Mild Steel



Pre-installed LED's with labels and key switch.



Close up of the included timers in the board.

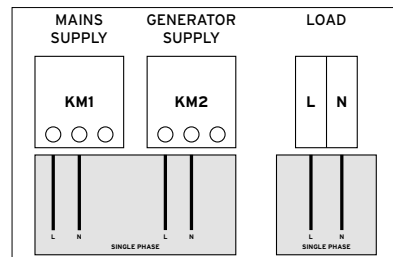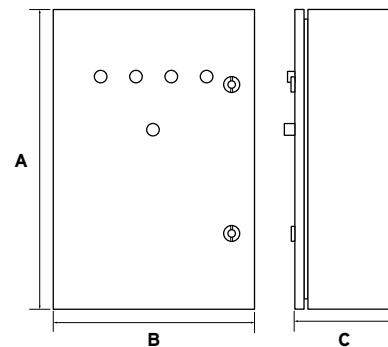

Part No.	Rated Current (A) AC21 at 400V	Terminal Size (mm <sup>2</sup> )	Dimensions			Qty
			A (mm)	B (mm)	C (mm)	
MS32ATS-SP	32	10mm <sup>2</sup>	600	400	200	1
MS60ATS-SP	60	16mm <sup>2</sup>	600	400	200	1
MS100ATS-SP	100	25mm <sup>2</sup>	600	400	200	1
MS135ATS-SP	135	50mm <sup>2</sup>	600	400	200	1

More sizes available on request please call us on 0121 711 1990 or send us an email [sales@niglon.co.uk](mailto:sales@niglon.co.uk)

### Specifications //

- Standard of Compliance - EN 60947-6-1
- Supplied - Fully assembled and tested
- Material - Mild steel enclosure
- IP Rating - IP65
- Finish - Epoxy powder paint
- Colour - RAL 7035
- Gland Plate - Bottom entry
- Included - Wall mount brackets, double bit lock

# Automatic Transfer Switches 4 Pole // GRP





Data Sheet  
  
 Download



Pre-installed LED's with labels and key switch



Close up of the included timers in the board.

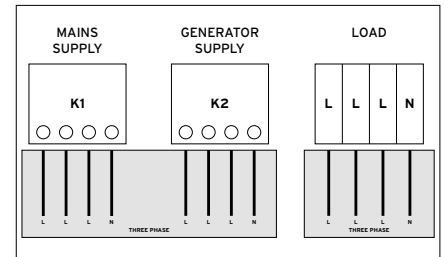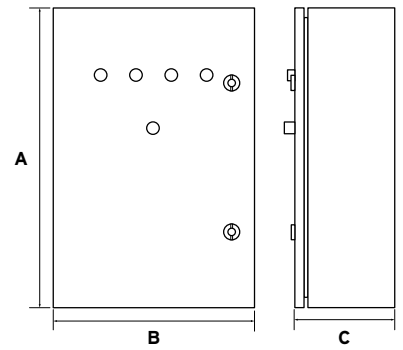

Part No.	Rated Current (A) AC21 at 400V	Terminal Size (mm <sup>2</sup> )	Dimensions			Qty
			A (mm)	B (mm)	C (mm)	
PC40ATS	40	10mm <sup>2</sup>	600	400	210	1
PC60ATS	60	16mm <sup>2</sup>	600	400	210	1
PC100ATS	100	25mm <sup>2</sup>	600	400	210	1
PC135ATS	135	50mm <sup>2</sup>	600	400	210	1

More sizes available on request please call us on 0121 711 1990 or send us an email sales@niglon.co.uk

**Specifications //**

- Standard of Compliance - EN 60947-6-1
- Supplied - Fully assembled and tested
- Material - Glass fibre reinforced polycarbonate
- IP Rating - IP65
- Colour - RAL 7035

# Automatic Transfer Switches 4 Pole // Mild Steel





Data Sheet  
  
 Download



Pre-installed LED's with labels and key switch.



Close up of the included timers in the board.

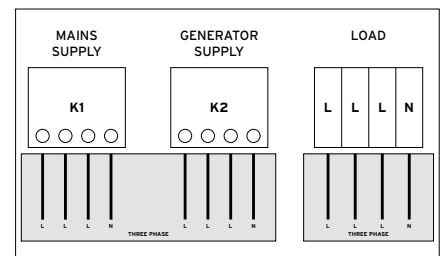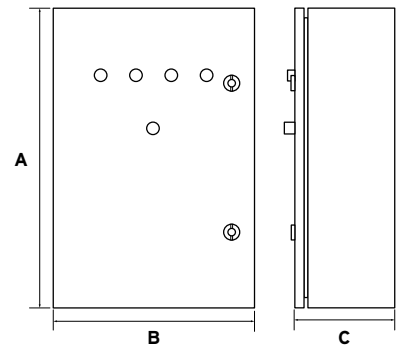

Part No.	Rated Current (A) AC21 at 400V	Terminal Size (mm <sup>2</sup> )	Dimensions			Qty
			A (mm)	B (mm)	C (mm)	
MS40ATS	40	10mm <sup>2</sup>	600	400	200	1
MS60ATS	60	16mm <sup>2</sup>	600	400	200	1
MS100ATS	100	25mm <sup>2</sup>	600	400	200	1
MS135ATS	135	50mm <sup>2</sup>	600	400	200	1

More sizes available on request please call us on 0121 711 1990 or send us an email sales@niglon.co.uk

**Specifications //**

- Standard of Compliance - EN 60947-6-1
- Supplied - Fully assembled and tested
- Material - Mild steel enclosure
- IP Rating - IP65
- Finish - Epoxy Powder Paint
- Colour - RAL 7035
- Gland Plate - Bottom Entry
- Included - Wall mount brackets, double bit lock