


Enclosed MCCB 4 Pole // Mild Steel



Close up of enclosed MCCB switch.

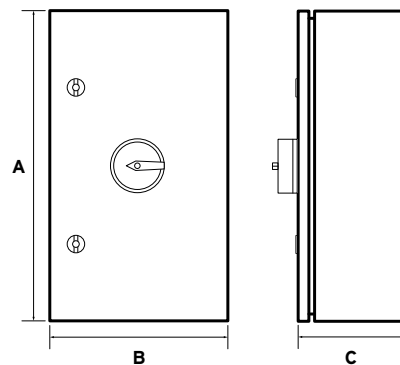

Part No.	Rated Current (A)	Thermal Adjustment Range (A)	Breaking Capacity	Dimensions			Qty
				A (mm)	B (mm)	C (mm)	
MS4MCCB-125	125	88 - 125	25kA	500	400	200	1
MS4MCCB-160	160	112 - 160	25kA	500	400	200	1
MS4MCCB-200	200	140 - 200	35kA	600	400	200	1
MS4MCCB-250	250	175 - 250	35kA	600	400	200	1
MS4MCCB-315	315	221 - 315	35kA	800	600	200	1
MS4MCCB-400	400	280 - 400	35kA	800	600	200	1

More sizes available on request please call us on 0121 711 1990 or send us an email sales@niglon.co.uk


Specifications // Enclosure

- Standard of Compliance - IEC 61439-1, IEC62208, IEC 60529 & IEC 62262
- Material - Mild Steel
- Finish - Epoxy Powder Paint
- Colour - RAL7035

Specifications // MCCB

- Standard of Compliance - IEC60947-2
- Adjustable Thermal Protection - 0.7 to 1 x In
- Adjustable Magnetic Protection - 200A & above
- Certifications - 

Enclosed CBR 4 Pole (MCCB + RCD) // Mild Steel

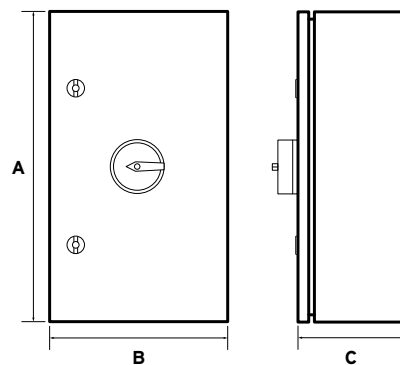

Part No.	Rated Amperage	Rated Amperage	Dimensions			Weight (Kg)	Qty
			A (mm)	B (mm)	C (mm)		
MS4CBR-125TSM	125	80 - 125	500	400	200	13	1
MS4CBR-160TSM	160	100 - 160	500	400	200	14	1
MS4CBR-200TSM	200	130 - 200	500	400	200	15.5	1
MS4CBR-250TSM	250	160 - 250	500	400	200	15.5	1
MS4CBR-400TSM	400	260 - 400	500	400	200	17	1

More sizes available on request please call us on 0121 711 1990 or send us an email sales@niglon.co.uk

Specifications // Enclosure

- Standard of Compliance - IEC 61439-1, IEC62208, IEC 60529 & IEC 62262
- Material - Mild Steel
- Finish - Epoxy Powder Paint
- Colour - RAL7035

Specifications // CBR

- Standard of Compliance - IEC60947-2
- Adjustable Thermal Protection - 0.7 to 1 x In
- Adjustable Magnetic Protection - 200A & above
- Certifications - 