

ENCLOSED SWITCHGEAR

SWITCHFUSE ACCESSORIES 400AUX2/2SF




**Bolt on auxiliary contact for 200A to 400A switch fuse.
Allows electrical interlocking, remote indication and alarm
monitoring.**

General Characteristics

| | |
|------------------------|--------------------------|
| Ingress protection | IP00 |
| Thermal current rating | 10A |
| AC15 rating at 415V | 4A |
| DC13 rating at 220V | 1A |
| Contact arrangement | 2NO and 2NC |
| Terminal Capacity | up to 1.5mm ² |
| Weight | 0.224Kg |

Wiring Diagram

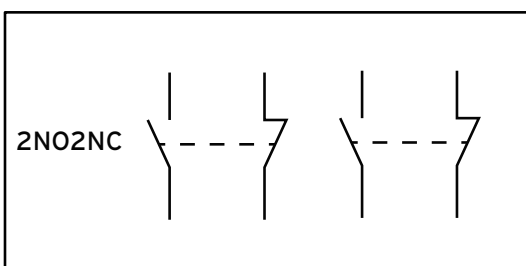

Additional Information

This product is for use by skilled persons or instructed persons. The installation of this product must comply with current IEE regulations. The IP rating of the unit can be compromised if the correct use of glands is not followed. Terminals, including those factory fitted, must be checked for correct tightness before commissioning. All terminals should be periodically checked for correct tightness. The data herein serves only to describe the product and should not be regarded as representing guaranteed properties in the legal sense. We reserve the rights of modification whilst every care has been taken in ensuring the accuracy of this catalogue, the Supplier accepts no liability whatsoever for any eventuality arising from errors or omissions within its catalogues, brochures or within any online presence.