

## ENCLOSED SWITCHGEAR

### BUSBAR CHAMBER BBC2054

Fully rated and certified busbar chamber in steel enclosure with top and bottom blank gland plates and removable side panels. Panels fixed with key hole slots. Intended for use with the Niglon range of switch isolators and switchfuses




#### General Characteristics

Standards	BS EN 61439-3
Rated Amperage	200A
Rated Voltage	415V
Material	Mild steel
Ingress Protection	IP41
Width	1500mm
Height	380mm
Depth	200mm
Number of internal supports	4
Weight	36 Kg

#### Available Accessories

Cable clamp lug connection up to 50mm <sup>2</sup> with 6mm hole	BBC2080C
Cable clamp connection up to 50mm <sup>2</sup>	BBC200C

#### Technical Drawing

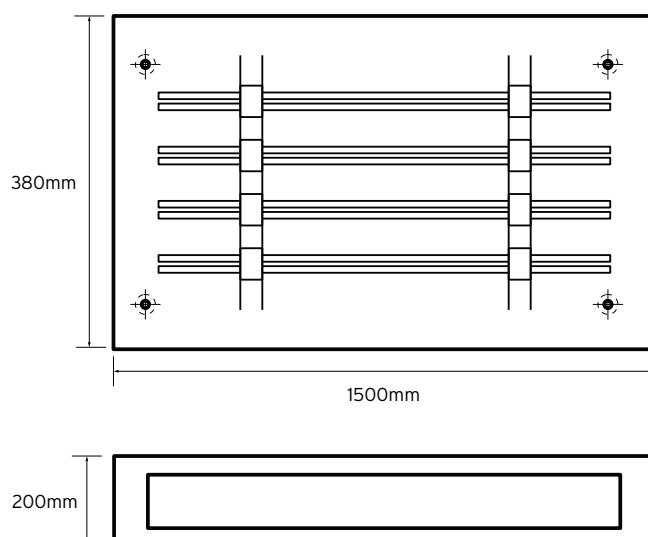

#### Additional Information

This product is for use by skilled persons or instructed persons. The installation of this product must comply with current IEE regulations. The IP rating of the unit can be compromised if the correct use of glands is not followed. Terminals, including those factory fitted, must be checked for correct tightness before commissioning. All terminals should be periodically checked for correct tightness. The data herein serves only to describe the product and should not be regarded as representing guaranteed properties in the legal sense. We reserve the rights of modification whilst every care has been taken in ensuring the accuracy of this catalogue, the Supplier accepts no liability whatsoever for any eventuality arising from errors or omissions within its catalogues, brochures or within any online presence.