


SPCO SLIMLINE 5 PIN RELAY 1P1212D, 1P1224D, 1P1224, 1P12115, 1P12230

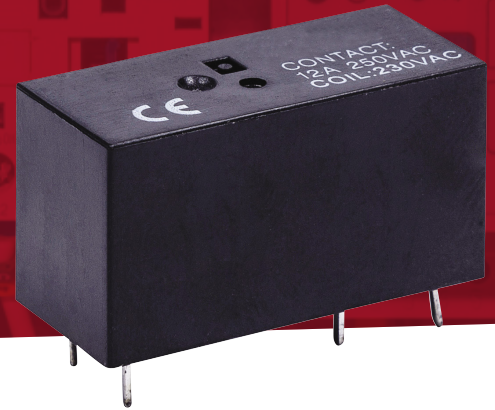

5 pin miniature relay with 1 changeover contact. Can be fitted by plugging into a din rail mounting socket or mounted directly onto a printed circuit board



General Characteristics

Number and Type of Contacts	1 CO
Contact Material	AgNi
Rated Switching Voltage	250V AC
Minimum Switching Voltage	5V
Rated Load AC1	12A
Minimum Switching Current	5mA
Rated DC Coil Power Consumption	400mW
Rated AC Coil Power Consumption	0,75VA
Electrical Life	10 000 ops
Mechanical Life	1 000 000 ops
Dimensions	29x13.2x17.7mm
Weight	20g
Operating Temperature	-40°C to +55°C
Cover Ingress Protection	IP40

Available Accessories

5PSOCK-SLIM	Din Rail Mounting Socket
1PRCLIP	Plastic Retain / Eject Clip
RM1	Plug-in Module for Diode 6/220V DC
RM2	Plug-in Module for LED Indication 24V AC/DC
RM3	Plug-in Module for LED Indication 100/240V AC/DC

Technical Drawing

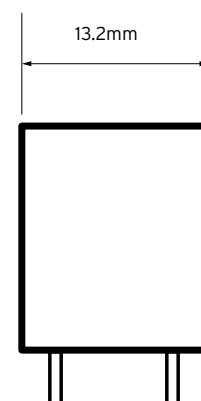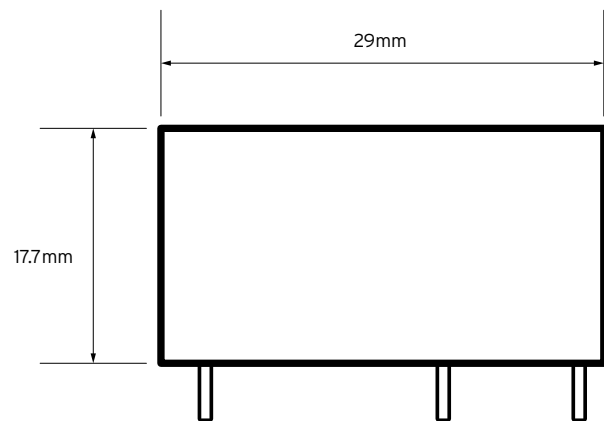

Additional Information

This product is for use by skilled persons or instructed persons. The installation of this product must comply with current IEE regulations. Terminals, including those factory fitted, must be checked for correct tightness before commissioning. All terminals should be periodically checked for correct tightness. The data herein serves only to describe the product and should not be regarded as representing guaranteed properties in the legal sense. We reserve the rights of modification, whilst every care has been taken in ensuring the accuracy of this catalogue, the Supplier accepts no liability whatsoever for any eventuality arising from errors or omissions within its catalogues, brochures or within any online presence.