



## PANEL COMPONENTS

### PANEL MOUNTED ANGLED SOCKET 57204

#### General Characteristics

|                               |                           |
|-------------------------------|---------------------------|
| Standard                      | BS EN 60309-1 & 2         |
| Voltage                       | 240V                      |
| Amperage                      | 16A                       |
| Poles                         | 2P+E                      |
| Terminal capacity flex cable  | 1.0 to 2.5mm <sup>2</sup> |
| Terminal capacity solid cable | 1.0 to 4.0mm <sup>2</sup> |
| Torque                        | 1 Nm                      |
| Degree of Ingress             | IP44                      |
| Weight                        | 116g                      |
| Flange Dimension              | 80 x 97mm                 |
| Fixing Centres                | 60 x 73mm                 |

#### Technical Drawing

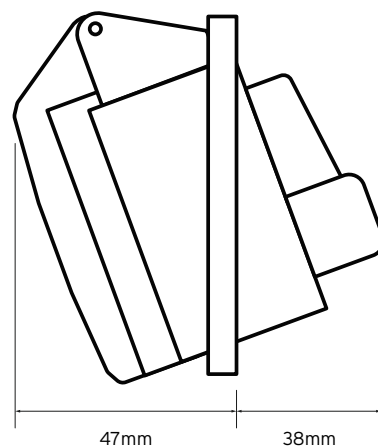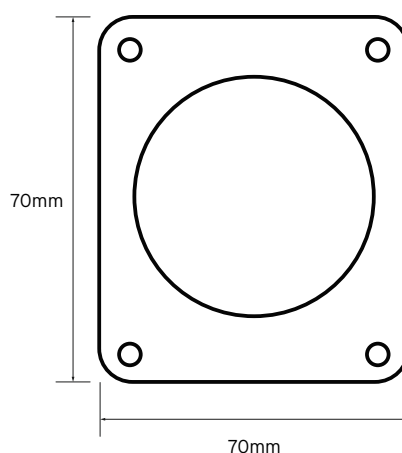

#### Additional Information

This product is for use by skilled persons or instructed persons. The installation of this product must comply with current IEE regulations. Terminals, including those factory fitted, must be checked for correct tightness before commissioning. All terminals should be periodically checked for correct tightness. The data herein serves only to describe the product and should not be regarded as representing guaranteed properties in the legal sense. We reserve the rights of modification, whilst every care has been taken in ensuring the accuracy of this catalogue, the Supplier accepts no liability whatsoever for any eventuality arising from errors or omissions within its catalogues, brochures or within any online presence.