

## PANEL COMPONENTS

### POWER DISTRIBUTION TERMINAL BLOCKS DIN-PB125




**Din rail mounting single pole terminal block for connection of power contacts. Clear cover gives visual inspection of connection**

#### General Characteristics

Standard	EN60947-7-1
Number of poles	1
Rated current UL/CSA	150A
Rated current IEC	125A
Rated voltage Ui	1000V
Icw KA rms 1s	4.2
Ipk KA	25
Width	20mm
Height	73mm
Depth	44mm
Construction material	PA66 UL94-V-0
Terminal construction	Brass; Zn plated
Terminal capacity	10mm <sup>2</sup> - 35mm <sup>2</sup>
Connection type	Hex head screw
Ingress protection	IP20
Weight	405g

#### Technical Drawing

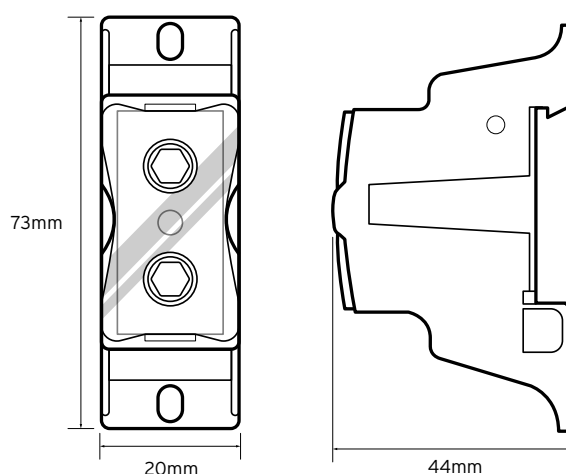

#### Additional Information

This product is for use by skilled persons or instructed persons. The installation of this product must comply with current IEE regulations. Terminals, including those factory fitted, must be checked for correct tightness before commissioning. All terminals should be periodically checked for correct tightness. The data herein serves only to describe the product and should not be regarded as representing guaranteed properties in the legal sense. We reserve the rights of modification, whilst every care has been taken in ensuring the accuracy of this catalogue, the Supplier accepts no liability whatsoever for any eventuality arising from errors or omissions within its catalogues, brochures or within any online presence.