

ENCLOSED SWITCHGEAR

POLYCARBONATE ROTARY ENCLOSED SWITCH DISCONNECTOR 4 POLE IS1504P-G




General Characteristics

Switch Standard	EN60947-1 & -3
Enclosure Standard	EN61439-1
Rated Current	150A
No of Poles	4
Rated Insulation Voltage (V)	690V
Rated Operating Current (A)	150A
AC-22A	150A
AC-23A	150A
AC-3	100A
Rated Voltage (Ue)	440V
Rated Power (kW)	45
Rated short-time withstand current (Icw)	3kA
Terminal Capacity	70mm ²
Terminal Torque	2.5Nm

Enclosure Characteristics


Construction	Glass Reinforced Polycarbonate
Overall Dimensions HxWxD	280x190x130 mm
Depth with Switch	180mm
Degree of IP	IP66
Colour	RAL7035

Wiring Diagram

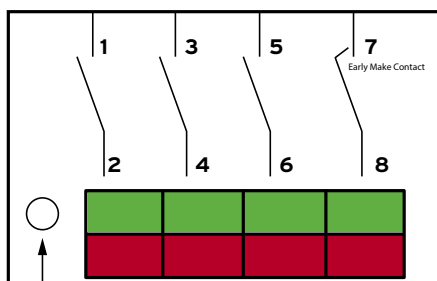

Note 7 = Early Make Contact

Technical Drawing

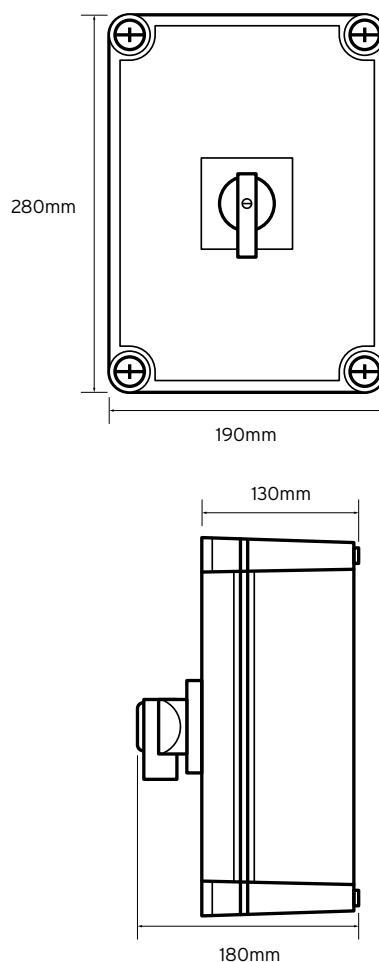

Additional Information

This product is for use by skilled persons or instructed persons. The installation of this product must comply with current IEE regulations. The IP rating of the unit can be compromised if the correct use of glands is not followed. Terminals, including those factory fitted, must be checked for correct tightness before commissioning. All terminals should be periodically checked for correct tightness. The data herein serves only to describe the product and should not be regarded as representing guaranteed properties in the legal sense. We reserve the rights of modification, whilst every care has been taken in ensuring the accuracy of this catalogue, the Supplier accepts no liability whatsoever for any eventuality arising from errors or omissions within its catalogues, brochures or within any online presence.