

PANEL COMPONENTS

PUSH-BUTTON STATION PPS1K3

Control station for surface mount. 3 position key switch, spring return to centre operation with key withdrawal in centre position only. Ronis 455 key supplied. ABS plastic construction



General Characteristics

Standard	EN 60947-5-1
Contact configuration	2 x 1 NO
Rated current Im	10A
Rated voltage Ui	500V
Operating force	10N; additional 5N
Contact operation	Slow action / positive opening
Knockouts	1 x 20mm top and bottom
Terminal Capacity	up to 1.5mm ²
Ingress protection	IP65
Height	74mm
Width	68mm
Depth	38mm
Depth including head	72mm
Construction	ABS Plastic
Weight	0.19Kg

Available Accessories

PA-CB1NO	Contact block only 1NO
PA-CB1NC	Contact block only 1NC

Technical Drawing

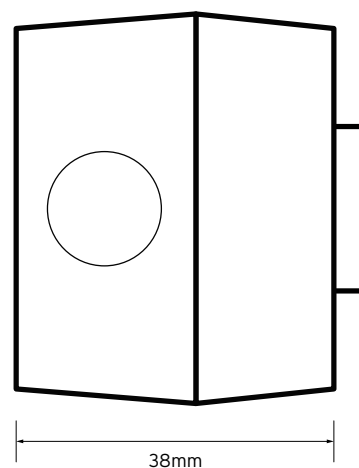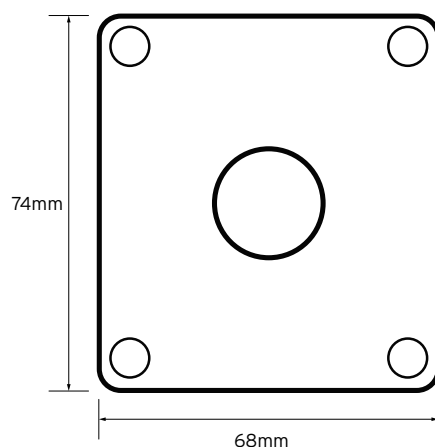

Additional Information

This product is for use by skilled persons or instructed persons. The installation of this product must comply with current IEE regulations. Terminals, including those factory fitted, must be checked for correct tightness before commissioning. All terminals should be periodically checked for correct tightness. The data herein serves only to describe the product and should not be regarded as representing guaranteed properties in the legal sense. We reserve the rights of modification, whilst every care has been taken in ensuring the accuracy of this catalogue, the Supplier accepts no liability whatsoever for any eventuality arising from errors or omissions within its catalogues, brochures or within any online presence.