
## **NiGLON** Cable Management

## NCM2C LV Resin Cable Joints

Technical Specifications	
Cable Diameter	Ø10-34mm
Max. 4 core	25mm <sup>2</sup>
Туре	Straight Joint
Standard of Compliance	BS EN 50393:2006-11 & IEC 60455-3-8:2013
Cable Types	PVC, PILC, XLPE, EPR
Voltage Rating	1000V
Polyurethane Resin	>1Kv
Colour	Transparent

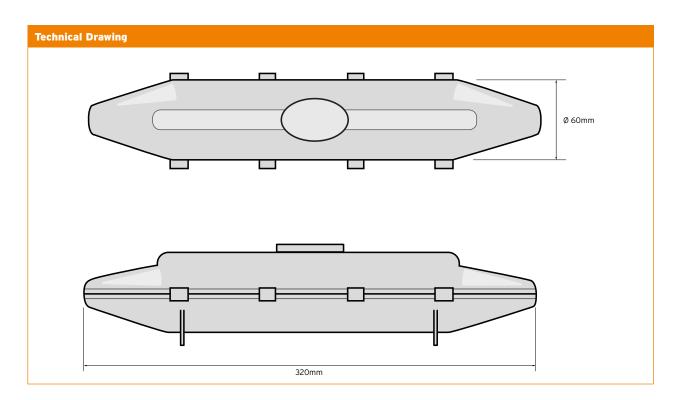

E&OE. Whilst every care has been take in ensuring the accuracy of this catalogue, the Supplier accepts no liability whatsoever for any eventuality arising from errors or omissions within its catalogues, brochures or within any online presence. o121 711 1990 niglon.co.uk | www.niglon.co.uk