
NiGLON Fixings & Tools

NSTO1 Socket Tester

Technical Specifications	
Maximum Voltage Between Input and the Ground	CAT.III 300V
Nominal Voltage Range	230VAC
Frequency	50Hz
Inout Current	<18mA
Opperating Temperature	0 to 40°C
Pollution degree	2
Dimensions	65 x 65 x 30mm (H x W x D)

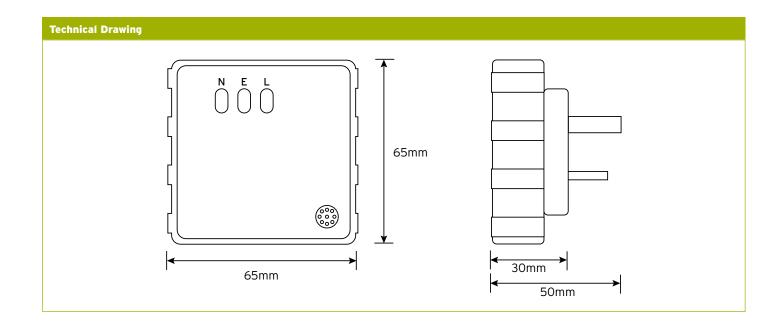

. Whilst every care has been take in ensuring the accuracy of this catalogue, the Supplier ts no liability whatsoever for any eventuality arising from errors or omissions within Its gues, brachures or within any online presence.

Ν

INDICATION

/!\

230V 50Hz

CATIII <18mA

TONE I Continuo<u>us</u>

Warble

Warble

Warble

Warble

Warble

Ε

WIRING

Correct

N Fault

L Fault

SOCKET TESTER

L-N Reverse

L-E Reverse E Fault

NST01 (E

THIS UNIT WILL

NOT DETECT EARTH

NEUTRAL REVERSE Short time operation:2min

🔵 ► ON 🛛

X FLASHING

FLASHING

o121 711 1990 niglon.co.uk | www.niglon.co.uk