
## **NiGLON** Fixings & Tools

## NTMO2 Pocket Multimeter

## **Technical Drawing**

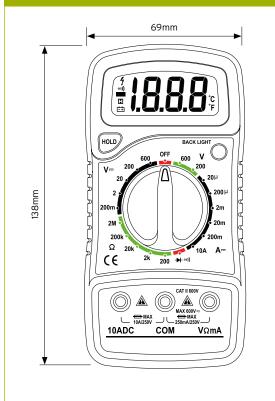

Technical Specifications	
Standard of Compliance	BS EN61326-1, IEC/BS EN61010-1/-2
Maximum Voltage Between Input and the Ground	CAT III 600V
Fuse	F1 250mA/600V F2 10A/600V
Power	9V Battery, NEDA 1604 or 6F22
Maximum Display Value	1999
Over-range Indication	"OL"
Polarity Display	"-" for Negative Polarity
Operating Temperature	0°C to 40°C
Storage Temperature	-10°C to 50°C
Dimensions	138mm x 69mm x 31mm (H x W x D)

## EAOE. Whilst every care has been take in ensuring the accuracy of this catalogue, the Supplier accepts no liability whatsoever for any eventuality arising from errors or omissions within its catalogues, brochures or within any online presence.

o121 711 1990 niGLON sales@niglon.co.uk | www.niglon.co.uk