



Polypropylene Pliable

Non Metallic
Flexible Conduit

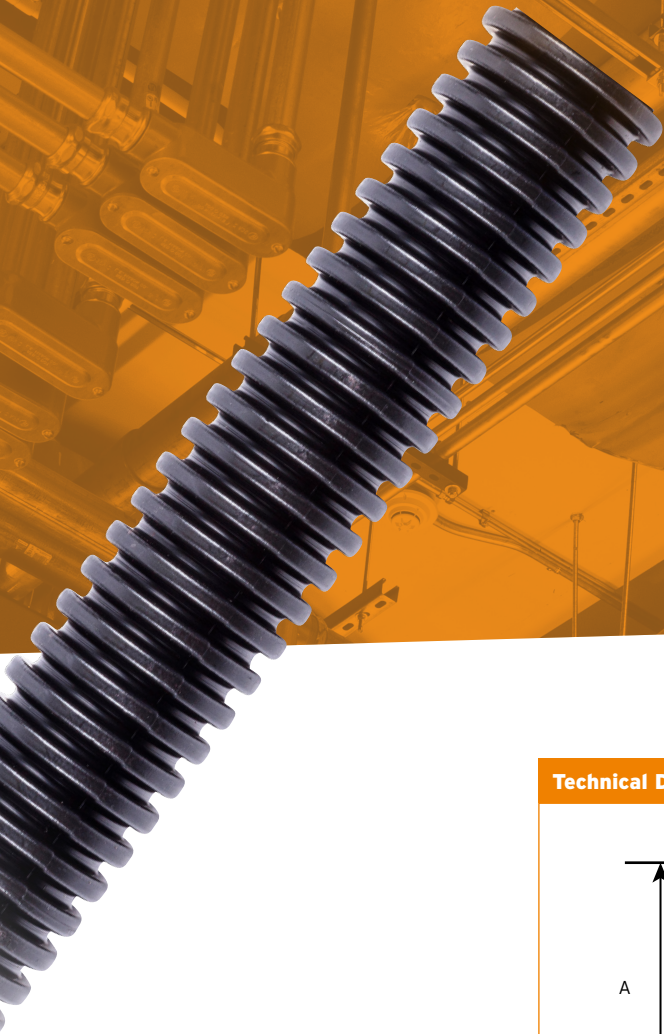

Technical Drawing

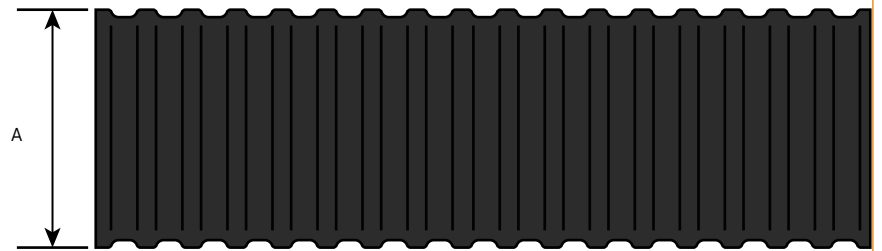

Technical Specifications

List No.	PP16B	PP20B	PP20W	PP25W	PP25B	PP32B	PP40B	PP50B
Material	Polypropylene	Polypropylene	Polypropylene	Polypropylene	Polypropylene	Polypropylene	Polypropylene	Polypropylene
Isolation	IP40	IP40	IP40	IP40	IP40	IP40	IP40	IP40
Temp Range	-5°C to +90°C	-5°C to +90°C	-5°C to +90°C	-5°C to +90°C	-5°C to +90°C	-5°C to +90°C	-5°C to +90°C	-5°C to +90°C
Crush resistance	350N	350N	350N	350N	350N	350N	350N	350N
Certified	VDE	VDE	VDE	VDE	VDE	VDE	VDE	VDE
Colour	Black	Black	White	White	Black	Black	Black	Black
Length	100m	100m	100m	50m	50m	50m	25m	25m
Diameter (A)	16mm	20mm	20mm	25mm	25mm	32mm	40mm	50mm