


NiGLON Cable Management

RO21SB Flexible Conduit NYLON PA 6 Flexible

Technical Drawing

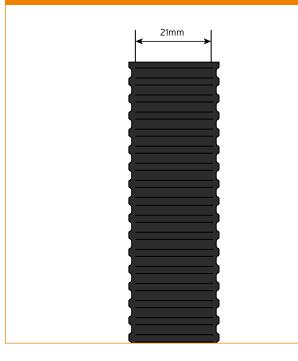

Technical Specifications	
Flame-retardent	HB UL94
Material	Nylon
Temp Range	-25°C to +120°C
Crush resistance	Class 2 - 320N
Length	50m
Colour	Black
Certified	VDE
Impact Class	Class 2 (1 Joule)
Size nominal	21mm
Standard of Compliance	BS 61386-1:2008-22:2004
Dimensions	(L) 50 m

EXOE. Whilst every care has been take in ensuring the accuracy of this catalogue, the Supplier accepts no liability whatsoever for any eventuality arising from errors or omissions within its catalogues, brochures or within any online presence. o121 711 1990 niGLON sales@niglon.co.uk | www.niglon.co.uk