NiGLON

Wiring Accessories


U-SP6INT-BC

10AX Intermediate Light Switch





Niglon's flagship range, manufactured from screwless stainless steel faceplates, with a luxurious brushed chrome finish.

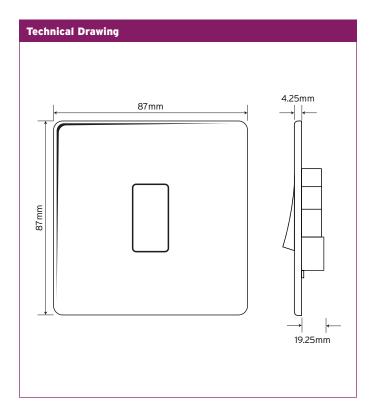

Technical Specification	s
Material Composition:	
Front Plate	Stainless Steel
Rear Housing	Urea
Terminals	Brass
Earth Strap	Mild Steel
Terminal Screws	Steel & Yellow Passivated Silver "on-lay" Copper/Brass Contacts
Voltage	240V ~ 50Hz
Current Rating	20A
Terminal Size	3.5mm
Torque Value	2.5Nm
Cable Size	3 x 1.5mm² or 2 x 2.5mm²
Back Box Depth	25mm - 47mm
Warranty	20 years
IP Rating	IP20
Operational Temperature	-5 ° to +40 °C
Standards	The Low Voltage Directive 2006/95/EC, Modified ISO 22196, EN 60669-1:1999 + A1:2002 + A2:2008 (BS EN60669-1:2000)