


A modern range of ultra-slim, smooth-edged, moulded wiring accessories-manufactured in a bright white Urea.

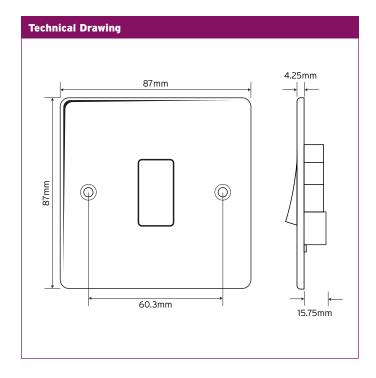

Technical Specifications	
Material Composition:	
Front Plate	Urea
Rear Housing	Urea
Terminals	Brass
Earth Strap	Mild Steel
Terminal Screws	Steel & Yellow Passivated Silver "on-lay" Copper/Brass Contacts
Voltage	240V ~ 50Hz
Current Rating	10AX (suitable for inductive loads)
Terminal Size	3.5mm Ø
Torque Value	0.5Nm
Cable Size	4x1.5mm² or 2x2.5mm²
Back Box Depth	16mm - 47mm
Warranty	30 years
IP Rating	IP20
Operational Temperature	-5 ° to +40 °C
Standards	BS EN 60669-1:1999 + A1:2002 + A2:2008