
NiGLON Circuit **Protection**

RCB01-40/30SS-A Type RCB0 1P+N - Space saver 230V A Type 40A 30mA B Space Saver

Technical Specifications	
Max Rating	40A 230V
Tripping Curve	Туре В
Breaking Capacity	6kA
Rated tripping current	30mA
Тгір Туре	Residual AC currents and pulsating DC currents
Cable Capacity	25mm²line in 10mm²live out/neutral out
Standard of Compliance	BS EN 61109
Certified	SEMCO & CE
Dimensions	18mm W x 83mm H x 66mm D

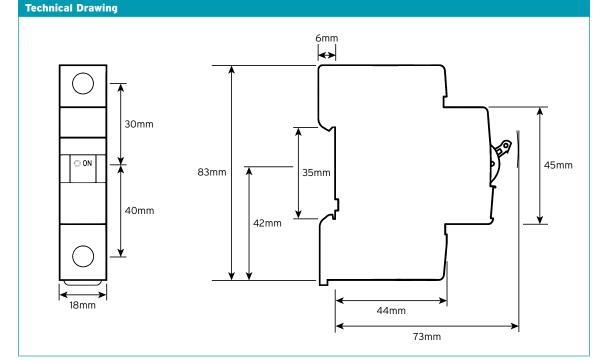

0121 711 1990 **NIGLON**

EXOE. Whilst every care has been take in ensuring the accuracy of this catalogue, the supplie accepts no liability whatsoever for any eventuality arising from errors or omissions within its catalogues, brochures or within any online presence.

OUT LOAD OUT

NiGLON

230V~ 🖂

6000 IEC61009-1

LINE

30mA

1

sales@niglon.co.uk | www.niglon.co.uk