


niGLON

Installation Essentials



DFR2 RF - Room Thermostats

Technical Drawing

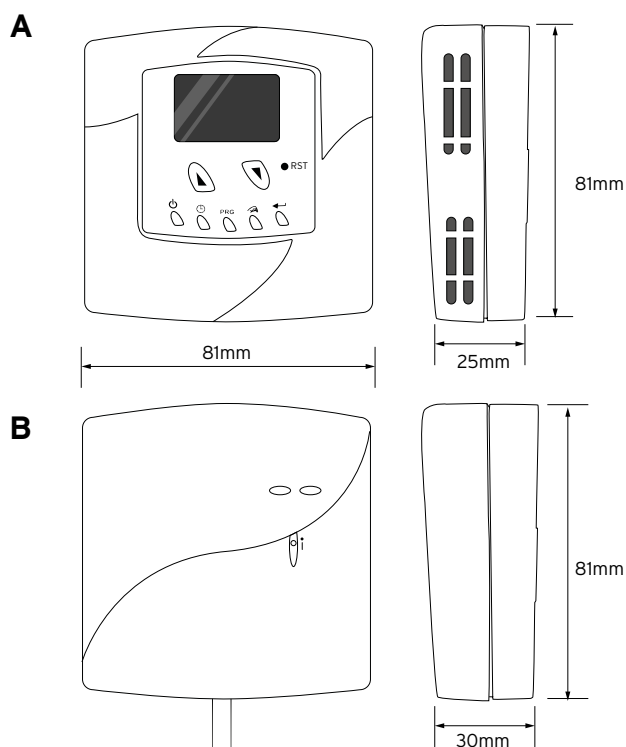

Technical Specifications

| | |
|----------------------------------|---|
| Temperature Measurement: | 0.0 °C to 40°C (0.1 °C / step) |
| Accuracy | ± 0.5 °C |
| Temperature Control Range | 5.0 °C - 35.0 °C (0.5 °C / step) |
| Terminals | 2.5mm ² cable |
| Electronic Control | Type 2.B action |
| Transmitter - Battery | 2 x 1.5 V AAA alkaline battery |
| Receiver- Input Voltage | 240Vac |
| Receiver - Output Voltage | 24..240Vac, 50/60Hz , 10(3) A max |
| Operating Temperature | 0 to 50 °C |
| Storage Temperature | -10 °C to 60 °C |
| Sensing Element | NTC Thermistor |
| Dimensions | (A) 81 x 81 x 25mm (H x W x D) (B) 81 x 81 x 30 mm (H x W x D) |