
NiGLON Installation **Essentials**

Lighting Type Push-Fit Connector



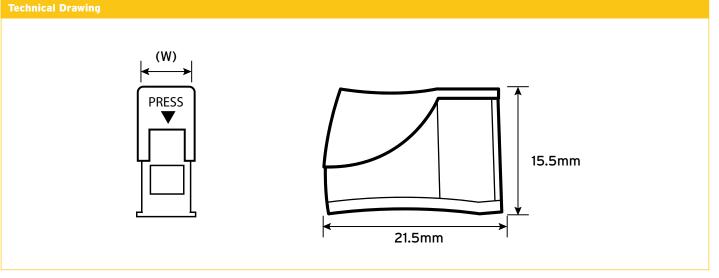

List No.

Rating

Temperature Material

Standard of Compliance

Conductor Entry -

Conductor Entry -Installation side LPC1

90°C

1 x solid

Grey

2

450V, 24A

Polycarbonate UL94 V2

1 x solid, stranded or fine

15.5 x 8.2 x 21.5mm (H x W x D)

BS 60998-1 60998-2-2 🖄 🧲

o121 711 1990 niglon.co.uk | www.niglon.co.uk

LPC2

90°C

3

2 x solid

White

450V, 24A

Polycarbonate UL94 V2

1 x solid, stranded or fine

15.5 x 9.6 x 21.5mm (H x W x D)

BS 60998-1 60998-2-2 🖄 CE

EXOE. Whilst every care has been take in ensuring the accuracy of this document, the Supplier accepts no liability whatsoever for any eventuality arising from errors or omissions within its catalogues, brochures, printed media or within any online presence.