
NiGLON Installation **Essentials**

NG85-50 IP66 Membrane Moulded

Technical Specifications	
Voltage	400V
Material	PP+GF, Gasket TPE, Flame Retardant, UV Resistant
Glow wire test	750°C
Temp. Range	-30°C - +100°C
Membrane or threaded cable entries	6xM20
Standards	CE &Rohs
IP Rating	IP66
Dimensions	86 x 49 x 50mm
Colours	White, Black, Grey

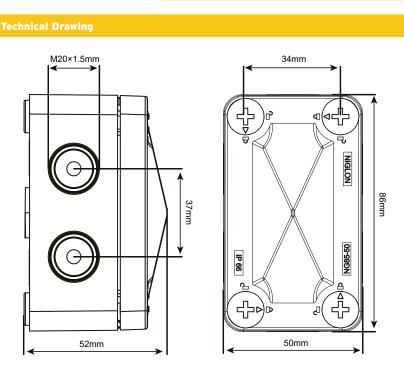

W.niglon.co.uk

ESOE. Whilst every care has been take in ensuring the accuracy of this document, the Supplier accepts no liability whatsoever for any eventuality arising from errors or omissions within its catalogues, brochures, printed media or within any online presence.

ales@niglon.co.uk | www.niglon.co