


### S132RCDM


13A 2 Gang  
Switched Socket  
RCD protected  
(Latching)

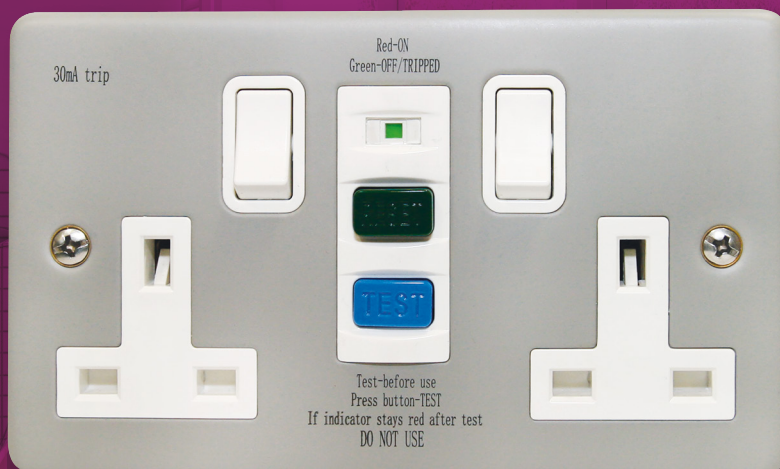

20  
YEAR  
GUARANTEE

A comprehensive range of metal clad wiring accessories for use in the most demanding environments. Manufactured from heavy duty steel and finished in satin silver.

#### Technical Drawing

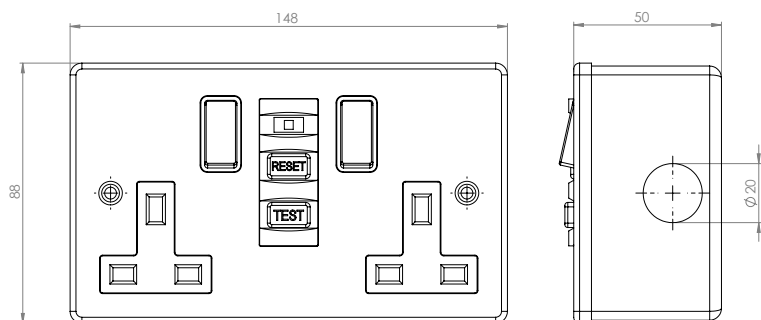

#### Technical Specifications

##### Material Composition:

Front Plate	Mild Steel
Rear Housing	PC
Terminals	Brass
Internal Mechanism	Formed Press Brass Silver "on-lay" Copper / Brass Contacts
Earth Strap	Mild Steel
Terminal Screws	Steel & Yellow Passivated
Voltage	240V ~ 50Hz
Current Rating	13A
Torque Value	2.0Nm
Cable Size	3x2.5mm <sup>2</sup> , 2x4.0mm <sup>2</sup> , 1x6mm <sup>2</sup>
Breaking Capacity	250A
Short Circuit Withstand	1500A
RCD Type	A
Switched	Yes
Double Pole	Yes
Twin Earth	Yes
Warranty	20 years
IP Rating	IP20
Operational Temperature	-5 ° to +40 °C
RCD Protection	30mA 40ms
Standards	BS1363, BS7288-2016
Mounting	Surface
Knockouts	8 x 20mm, (2 x 3) (2 x 1)