


## 12-Way Strips

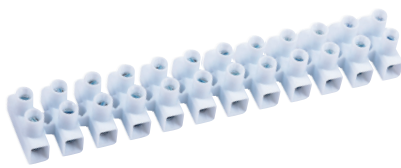

**Specifications**  
• Max working temp 80°C

**Certified**  
CE

### Economy Range T80 - 450V (White)

List No.	Amps	Size	Pack Qty
PN2	2.5A	1.0-4mm <sup>2</sup>	10
PN5	5A	1.5-6mm <sup>2</sup>	10
PN15	15A	2.5-10mm <sup>2</sup>	10
PN30	30A	4.0-16mm <sup>2</sup>	10
PN50	60A	6.0-25mm <sup>2</sup>	10



**Standard of Compliance**  
Self extinguishing (BS EN60998-1)

**Specifications**  
• Max cont temp rating 150°C (180°C peak)  
• Glow wire tested 850°C  
• Flame Tested UL94 V0  
• Snap free

**Certified**  
D'E CE

### Nylon-PA T150 - 450V (Brown)

List No.	Amps	Size	Pack Qty
BS5	5A	1.0-4mm <sup>2</sup>	10
BS15	15A	2.5-10mm <sup>2</sup>	10

## Porcelain




**Standard of Compliance**  
BS EN60998-1/EN60335

**Specifications**  
• 'c' Denotes centre fixing  
• These articles are non-inflammable  
• Maximum ambient temperature 280°C

### T280 - 450V

List No.	Amps	Poles	Pack Qty
PC51	5A	1	100
PC52	5A	2	100
PC53	5A	3	100
PC52c	5A	2	100
PC151	15A	1	100
PC152	15A	2	100
PC153	15A	3	100
PC152c	15A	2	100
PC301	30A	1	100
PC302	30A	2	50
PC302c	30A	2	50

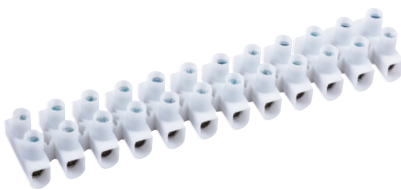

**Standard of Compliance**  
Self extinguishing (BS EN60998-1)

**Specifications**  
• Snap free  
• Max cont temp rating 80°C  
• Max short period temp rating 110°C  
• Glow wire tested 850°C  
• Flame tested UL94 V2

**Certified**  
D'E CE KEMA EUR N CECC NF

### Thermoplastic T80 - 450V (White)

List No.	Amps	Size	Pack Qty
PN2TCE	2.5A	1.0-4mm <sup>2</sup>	10
PN5TCE	5A	1.5-6mm <sup>2</sup>	10
PN15TCE	15A	2.5-10mm <sup>2</sup>	10
PN30TCE	30A	4.0-16mm <sup>2</sup>	10

**Standard of Compliance**  
Self extinguishing (BS EN60998-1)

**Specifications**  
• Max cont temp rating 110°C  
• Glow wire tested 850°C  
• Flame Tested UL94 V0  
• Snap free


**Certified**  
D'E CE



### Nylon-PA T110 - 450V (Natural)

List No.	Amps	Size	Pack Qty
NYN5	5A	1.5-6mm <sup>2</sup>	10
NYN15	15A	2.5-10mm <sup>2</sup>	10
NYN30	30A	4.0-16mm <sup>2</sup>	10

## Quickloop

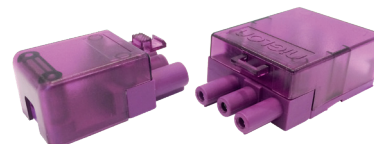

**Standard of Compliance**  
BS EN61535

**Specifications**  
• Cable: 4 x 1mm<sup>2</sup> flex / 3 x 2.5mm<sup>2</sup>  
• 20A rating

List No.	Description	Size (HxWxL)	Pack Qty
LC3P	3 pole connector + loop terminal	22x42x108mm	50
LC3P-FF	3 pole connector + loop terminal + fast fit	22x46x144mm	25