

## Heat Shrink Sleeving



### Standard of Compliance


UL224 VW1,  
AMS-dtl-23053/5 Cl 1&2  
CSA 066150  
RoHS 2

### Specifications

- Halogen free Polyolefin
- 2:1 Shrink ratio
- Operating temp -40°C to +135°C
- Flame retardant, self-extinguishing

## Heat Shrink Sleeving - Coil

List No.	Size	Length	Pack Qty
N-HS48BLK	4.8 - 2.4mm	10m	1
N-HS64BLK	6.4 - 3.2mm	10m	1
N-HS95BLK	9.5 - 4.7mm	10m	1
N-HS127BLK	13 - 6.5mm	8m	1
N-HS191BLK	19 - 9.5mm	5m	1
N-HS254BLK	25 - 13mm	3m	1
N-HS48BLU	4.8 - 2.4mm	10m	1
N-HS64BLU	6.4 - 3.2mm	10m	1
N-HS95BLU	9.5 - 4.7mm	10m	1
N-HS127BLU	13 - 6.5mm	8m	1
N-HS191BLU	19 - 9.5mm	5m	1
N-HS254BLU	25 - 13mm	3m	1
N-HS48BRO	4.8 - 2.4mm	10m	1
N-HS64BRO	6.4 - 3.2mm	10m	1
N-HS95BRO	9.5 - 4.7mm	10m	1
N-HS127BRO	13 - 6.5mm	8m	1
N-HS191BRO	19 - 9.5mm	5m	1
N-HS254BRO	25 - 13mm	3m	1
N-HS48REG	4.8 - 2.4mm	10m	1
N-HS64REG	6.4 - 3.2mm	10m	1
N-HS95REG	9.5 - 4.7mm	10m	1
N-HS127REG	13 - 6.5mm	8m	1
N-HS191REG	19 - 9.5mm	5m	1
N-HS254REG	25 - 13mm	3m	1
N-HS48GRE	4.8 - 2.4mm	10m	1
N-HS64GRE	6.4 - 3.2mm	10m	1
N-HS95GRE	9.5 - 4.7mm	10m	1
N-HS127GRE	13 - 6.5mm	8m	1
N-HS191GRE	19 - 9.5mm	5m	1
N-HS254GRE	25 - 13mm	3m	1



### Specifications

- Halogen free Polyolefin
- 2:1 shrink ratio
- Each pack contains black, blue, brown, grey, green/yellow.
- 3 x 250mm (or 2 x 250mm where \* is shown)

## Heat Shrink Sleeving - Packs

List No.	Size	Suitable for tri-rated cables	Pack Qty
N-HS64PK	6.4 - 3.2mm	2.5/4/6mm <sup>2</sup>	1
N-HS127PK	12.7 - 6.4mm	10/16/25mm <sup>2</sup>	1
N-HS191PK*	19.1 - 9.5mm	35/50/70mm <sup>2</sup>	1
N-HS254PK*	25.4 - 12.7mm	95/120mm <sup>2</sup>	1

## Cable Walkover



### Standards of Compliance

BS EN 476 Part 7 Class 3  
DIN 4102 Part 1 & Class B1  
BS EN 903-C5, 500V

### Specifications

- Fire retardant
- Low smoke - Low Fume
- Non toxic
- Non conductivity


### Certified



## Heavy Duty Cable Walkover



List No.	Hole Size	Overall Size	Pack Qty
RCP110	14 x 8mm	68 x 11mm	1 x 9m
RCP310	30 x 10mm	84 x 14mm	1 x 9m
RCP210	1 x 25 + 1 x 15mm	88 x 14mm	1 x 9m

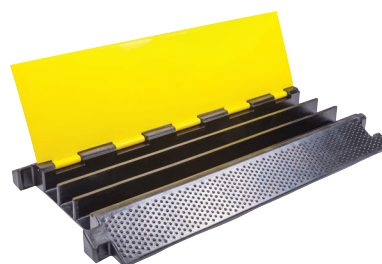

### Specifications

- 3 cable channels (each 60 x 40mm)

### Certified



## Heavy Duty Three Channel Cable Protector

List No.	Dimensions (L x W x H)	Pack Qty
HDCP	910 x 500 x 70mm	1

Looking for **PVC Sleeving**?  
See page **60**

