NiGLON Wiring **Accessories**




D-S132USB3C-BCG

2 Gang Socket Outlet with 1xUSB Type C & 1xUSB Type A (Twin Earth)



NiGLON

A contemporary low-profile design, manufactured with stainless steel faceplates, in a luxurious brushed chrome effect finish.

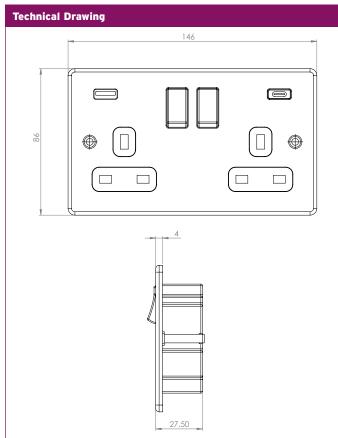

Technical Specifications	
Material Composition:	
Front Plate	Stainless Steel
Rear Housing	Nylon
Terminals	Brass
Earth Strap	Mild Steel
Terminal Screws	Steel & Yellow Passivated
Voltage	240V ~ 50Hz
Current Rating	13A
USB Charging Output	5V DC 3.1A
USB Output Connector	1x USB Type "A" & 1x USB Type "C"
USB Standby Current	2mA
Torque Value	1.2 Nm
Cable Size	3x2.5mm ²
Back Box Depth	35mm - 47mm
Switched	Yes
Single Pole	Yes
Twin Earth	Yes
Warranty	2 years
IP Rating	IP20
Operational Temperature	-5 ° to +40 °C
Standards	BS1363-2, BS EN 62368, EN61000-6, EMC directive 2014/30/EU
Dimensions	86x146x4mm (HxWxD)

E&OE. Whilst every care has been take in ensuring the accuracy of this catalogue, the Supplier accepts no liability whatsoever for any eventuality arising from errors or omissions within its catalogues, brochures or within any online presence. 0121 711 1990 sales@niglon.co.uk | www.niglon.co.uk