

# niGLON


## Circuit Protection

# MA425PC

## Contactors 230V AC N/O



### Technical Drawing

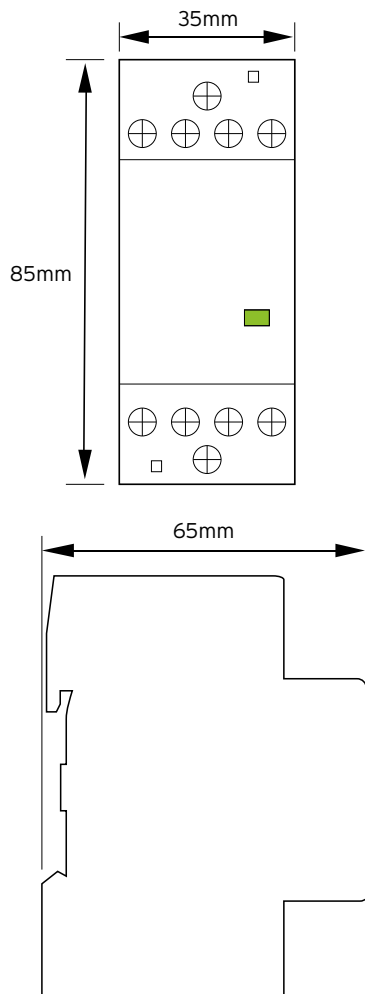

### Technical Specifications

<b>Standard of Compliance</b>	BS EN 61095 & BS EN 60947-4-1
<b>Certified</b>	CE
<b>Rated current(In)</b>	25
<b>Rated operational voltage(Ue)</b>	230/400V
<b>Control voltage(Uc)</b>	230VAC
<b>Number of module</b>	2
<b>Rated frequency</b>	50/60Hz
<b>Rated Operational Current</b>	AC1: 25A AC3: 9A
<b>Electrical endurance</b>	130,000 cycles
<b>Mechanical endurance</b>	1,000,000cycles
<b>Rated insulation voltage(Ui)</b>	500VAC
<b>Rated impulse withstand voltage(Uimp)</b>	4KV
<b>Terminals</b>	Pillar type
<b>Cable termination</b>	Main Circuit: 10mm <sup>2</sup> Max Control Circuit: 4mm <sup>2</sup> Max
<b>Torque of screw</b>	0.9Nm/1.0Nm
<b>IP degree</b>	IP20
<b>Dimensions</b>	85x35x65mm
<b>Number of poles</b>	4