


P-132USB-3

2 Gang
Switched with
1 x 2.1A &
1 x 1A USB



A modern range of ultra-slim, smooth-edged, moulded wiring accessories manufactured in a bright white Urea.

Technical Drawing

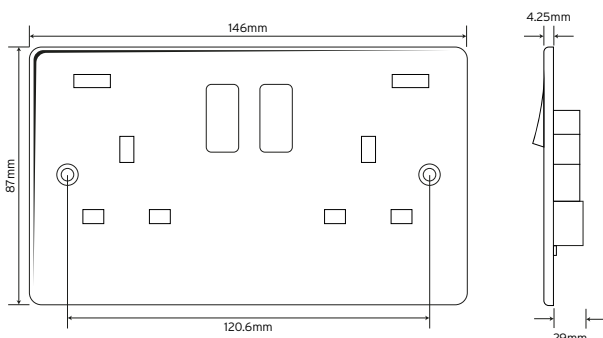

Technical Specifications

Material Composition:

Front Plate	Urea
Rear Housing	Nylon
Terminals	Brass
Earth Strap	Mild Steel
Terminal Screws	Steel & Yellow Passivated Silver "on-lay" Copper/Brass Contacts
Voltage	240V ~ 50Hz
Mains Current Rating	13A 240V
USB Current Rating	5V - 1x 2.1A + 1x 1A ports
Torque Value	1.2Nm
Cable Size	3x2.5mm ²
Back Box Depth	25mm - 47mm
Switched	Yes
Twin Earth	Yes
Warranty	2 years
IP Rating	IP20
Operational Temperature	-5 ° to +40 °C
Standards	BS EN 62368