



D-S132USB-BC

2 Gang Socket
Outlet with
1x2.1A & 1x1A USB
Type A
(Twin Earth)

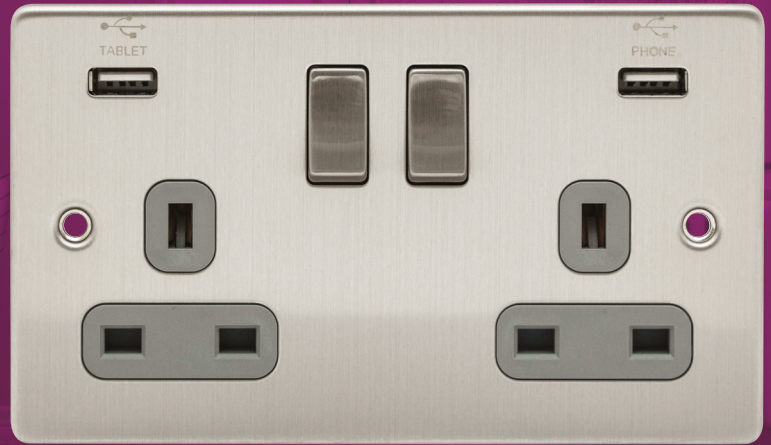

A contemporary low-profile design, manufactured with stainless steel faceplates, in a luxurious brushed chrome effect finish.

Technical Drawing

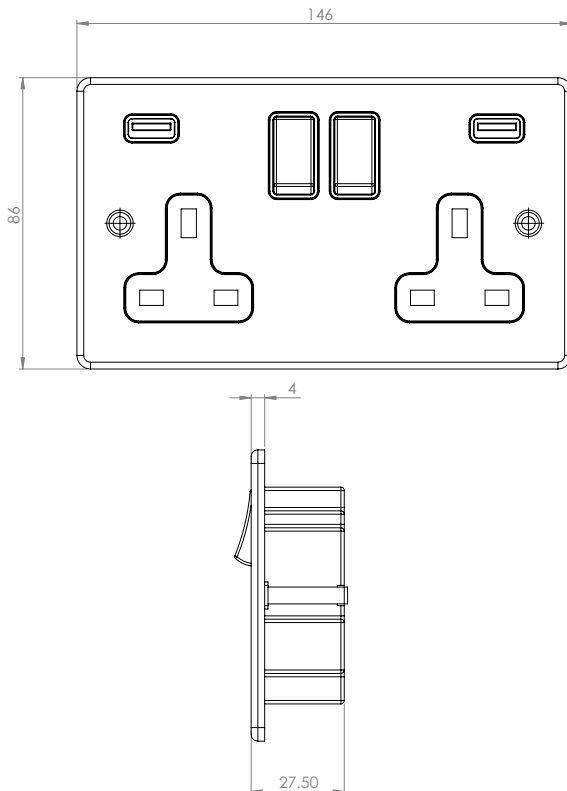

Technical Specifications

Material Composition:

Front Plate	Stainless Steel
Rear Housing	Nylon
Terminals	Brass
Earth Strap	Mild Steel
Terminal Screws	Steel & Yellow Passivated
Voltage	240V ~ 50Hz
Current Rating	13A
USB Charging Output	5V DC 3.1A
USB Output Connector	1 x 2.1A & 1 x 1A Both Type 'A'
USB Standby Current	2mA
Torque Value	1.2 Nm
Cable Size	3x2.5mm ²
Back Box Depth	35mm - 47mm
Switched	Yes
Single Pole	Yes
Twin Earth	Yes
Warranty	2 years
IP Rating	IP20
Operational Temperature	-5 ° to +40 °C
Standards	BS1363-2, BS EN 62368, EN61000-6, EMC directive 2014/30/EU
Dimensions	86x146x4mm (HxWxD)