

# niGLON


## Circuit Protection

# MA463PC

## Contactors 230V AC N/O



### Technical Drawing

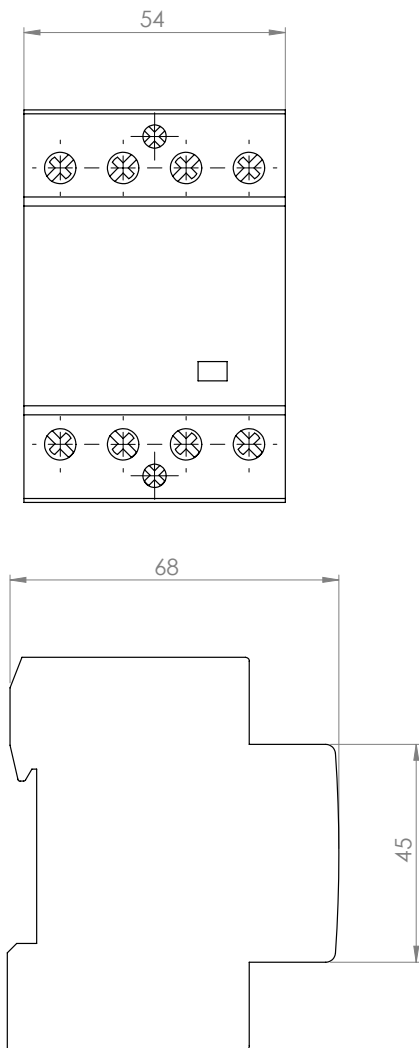

### Technical Specifications

<b>Standard of Compliance</b>	BS EN 61095 & BS EN 60947-4-1
<b>Certified</b>	CE, UKCA, & SEMKO
<b>Rated current (In)</b>	63
<b>Rated operational voltage (Ue)</b>	230/400V
<b>Control voltage (Uc)</b>	230VAC
<b>Number of module</b>	3
<b>Rated frequency</b>	50/60Hz
<b>Utilization category</b>	AC1
<b>Electrical endurance</b>	150,000 cycles
<b>Mechanical endurance</b>	3,000,000cycles
<b>Rated insulation voltage (Ui)</b>	500VAC
<b>Rated impulse withstand voltage (Uimp)</b>	4KV
<b>Terminals</b>	Pillar type
<b>Cable termination</b>	Main Circuit : 25mm <sup>2</sup> Max Control Circuit : 6mm <sup>2</sup> Max
<b>Max Torque of screw</b>	2 Nm
<b>IP degree</b>	IP20
<b>Dimensions</b>	85x54x68
<b>Number of poles</b>	4