
NiGLON General Lighting

PST30 110V Portable Site Transformer

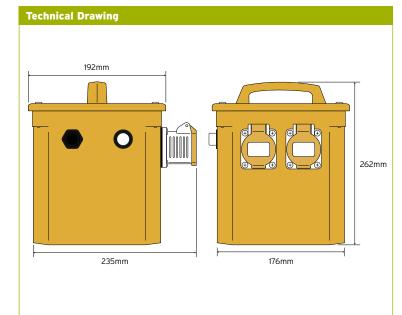

Technical Specifications	
Portable Transformer	3.0KVA
Safety Level	Class I
IP Rating	IP44
Certifications	CE®
Case	Glass Reinforced Plastic (GRP)
Lid	Glass Reinforced Plastic (GRP)
Input Voltage	230V AC 1 Phase
Output Voltage	110V AC Star point earthed
Frequency	50/60Hz
Tool Rating	3000VA
Cont. Rating	1650VA
Overload Switch	10Amp
Cable	1.0mm ² 3 core rubber Cable 0 H05RN-F
Cable Dimensions	1500mm in length
Output sockets	2x110V 16Amp 2P+E, IP44
Plug	230V, 13A BS UK 3pin plug with 13A fuse

ESOE. Whilst every care has been take in ensuring the accuracy of this catalogue, the Supplier accepts no liability whatsoever for any eventuality arising from errors or omissions within its catalogues, brochures or within any online presence. o121 711 1990 niglon.co.uk | www.niglon.co.uk