
## **NiGLON** Circuit **Protection**

RCD4-80/30-A

TP + Switched N. 4 Module RCD A Type

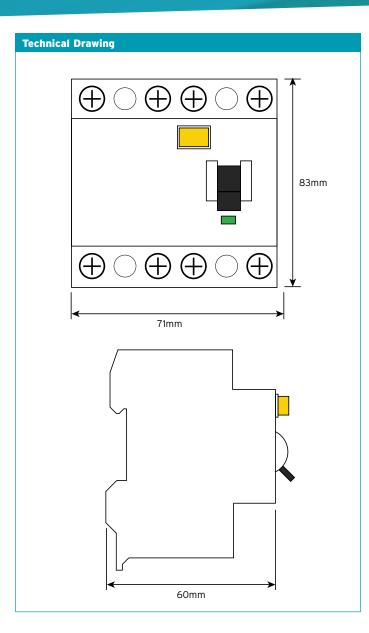

Technical Specifications	
Rated current(In)	80A
Rate voltage(Un)	400V
Rated residual current	30mA
Number of Poles	3P + N
Rated Short Circuit	6kA
Breaking Capacity	10kA
Rated frequency	50/60Hz
Electrical endurance	10000 cycles
Mechanical endurance	20000 cycles
Terminals	Cage Type
Cable Capacity	35mm²
Torque of screw	2.5Nm
Standard of Compliance	BS EN61008-1
Certified	intertek 🛇 🤇 🧲
Dimensions	83 x 71 x 60mm (HxWxD)
RCD Type	А

## o121 711 1990 niglon.co.uk | www.niglon.co.uk

E&OE. Whilst every care has been take in ensuring the accuracy of this document, the Supplier accepts no liability whatsoever for any eventuality arising from errors or omissions within its catalogues, prochures, printed media or within any online presence.

Ν

**NiGLON** 

400V~ 2  Test

D.OF