

RELAYS

SOCKET FOR 3PCO PLUG-IN RELAYS 11PSOCK

Din rail mounting relay socket for undecal relays. Can be surface mounted. Screw terminals to cage clamp




General Characteristics

Number of poles	3
Number of pins	11
Rated Current	12A
Rated Voltage	300V
Terminal Capacity	up to 2.5mm ²
Screw thread	M3
Tightening Torque	0.7 Nm
Width	38mm
Height	62mm
Depth	26mm
Weight	0.15Kg



Accessories

RM1	Plugin diode module 6/220V DC
RM2	Plugin LED module 24V AC/DC
RM3	Plugin LED module 110/230V AC

Wiring Diagram

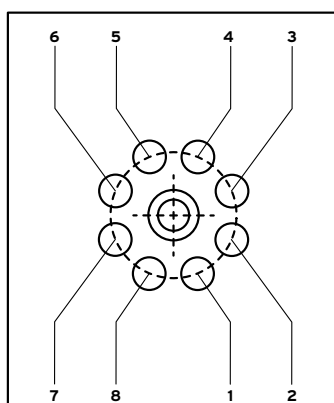

Technical Drawing

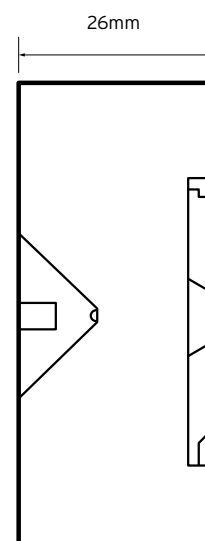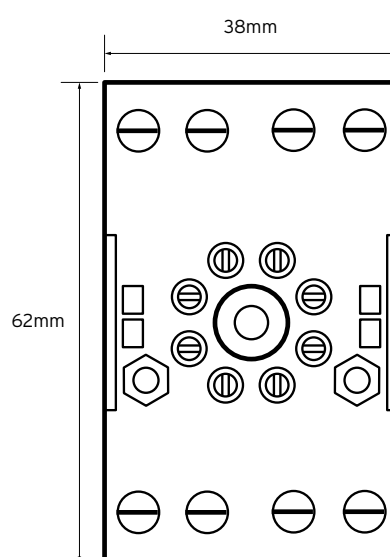

Additional Information

This product is for use by skilled persons or instructed persons. The installation of this product must comply with current IEE regulations. Terminals, including those factory fitted, must be checked for correct tightness before commissioning. All terminals should be periodically checked for correct tightness. The data herein serves only to describe the product and should not be regarded as representing guaranteed properties in the legal sense. We reserve the rights of modification, whilst every care has been taken in ensuring the accuracy of this catalogue, the Supplier accepts no liability whatsoever for any eventuality arising from errors or omissions within its catalogues, brochures or within any online presence.